

# CORKIA SUPRA

LCF3403LW3 SmartZ®

Taric 9405114090



## Technical Standards

EN-60598-1, EN-60598-2-22, EN-62034, EN-303-446-1

## Certifications



## Functional Specifications

	Self-Contained
	Control system: Wireless SmartZ®
	AutoTest: Yes
	Type: Non-maintained
	Supply: 230V 50Hz<0.6W
	Non-maintained mode consumption: 0.6 W
	Emergency: 380 lm
	Duration: 3 h Battery: 6.4V-4.0Ah LiFePO <sub>4</sub>
	Charging time: 12 h

## Mechanical and Aesthetic Specifications

	Mounting: Ceiling Surface
	Insulation: Class II
	IP20
	IK04
	Lamp: 1 x LED 4W
	LED color temperature: 4000 K
	Body material: Cork
	Finish: Brown Cork
	Diffuser / Optics: Corner Polycarbonate Lens
	Working temperature: 0 / 40 °C
	Suitable for flammable surface: Yes



# CORKIA SUPRA LCF3403LW3

## Installation characteristics

Installation type:

- Ceiling/Wall surface.

Possibility of connection with:

- Surface conduit wiring.

Especially for changes of direction in corridors



## Operating characteristics

This luminaire is compatible with the SmartZ® intelligent emergency lighting management system, designed to facilitate maintenance and installation control. Thanks to its 2.4 GHz wireless communication capability, it creates a dynamic mesh network that allows the connection of more than 10,000 luminaires without the need for any additional wiring.

The system simplifies real-time monitoring by issuing automated alerts in case of potential failures, eliminating the need for any manual inspections.

Additionally, it has the facility to integrate with other systems, both wired and wireless.

If not connected to the mesh network, the luminaire will default and operate in Autotest mode, automatically performing the detailed tests listed below.

Microprocessor controlled luminaire that performs periodic and automatic tests.








Functional test every **7 days**.



Duration test every **365 days**.

The test result is shown in the status indicator LEDs.

The luminaire has status LEDs, which indicates:

- |   |  |  |
|---|--|--|
|  Green on: correct operation      |  Orange on: incorrect battery or duration |  Both leds off: no power supply or total failure of the luminaire |
|  Green flashing: test in progress |  Orange flashing: functional failure      |  |


## Accessories



CSZ03  
SMARTZ CONTROL UNIT+ UPS  
CSZ002+SAI002

# CORKIA SUPRA LCF3403LW3

## Spacing table

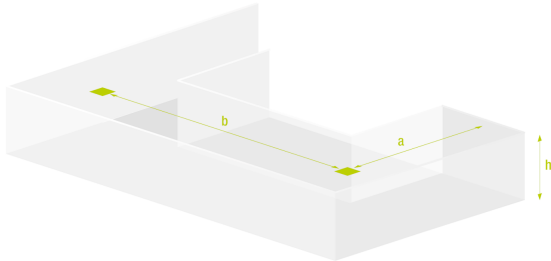

h	a	b
2 m	4,4 m	16,3 m
2.5 m	4,9 m	18,2 m
3 m	5,3 m	19,3 m
4 m	5,7 m	20,5 m
5 m	5,8 m	18,4 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

## Photometric guide

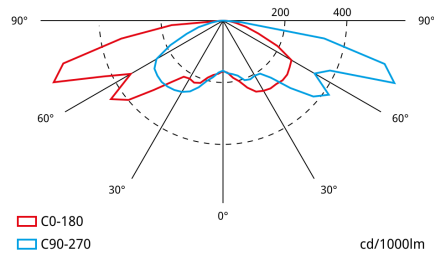

# CORKIA SUPRA LCF3403LW3

## Weight (kg)



Product weight:

0.28 kg

Boxed product weight:

0.31 kg

Weight of box of 15 units:

4.89 kg



## Dimensions (mm)

