

# HARENA



\*Under request

- IP42
- IK04
- Lm 120
- LED 4000°K
- 1-3h.
- 26m.
- LiFePO<sub>4</sub>
- 
- 
- 850°

## REFERENCES


lm	View Distance	Type*	Dur. (h)	Battery (Units/Ah)	Selftest	Wireless
-	26m.	M	1	3,2V 0,8A/h LFP	LHS3070LXP	LHS3070LDPW
120	26m.	M	1	3,2V 1,5A/h LFP	LHS3120LXP	LHS3120LDPW
-	26m.	M	3	3,2V 1,5A/h LFP	LHS3070LXP3	LHS3070LDP3W
120	26m.	M	3	3,2V 3,0A/h LFP	LHS3120LXP3	LHS3120LDP3W

\*M: Maintained. The luminaire operates from the normal or emergency supply at all material time.

It is supplied with a complete set of pictograms



## VIEWING DISTANCE

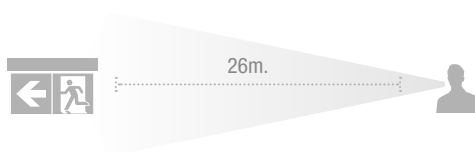

## DIMENSIONS

