

SPAZIO OUTDOOR

IP65 IK10



IP65

IK10

Lm
300

LED
4000°K

1h.




LiFePO₄

-10°




850°

DIMENSIONS

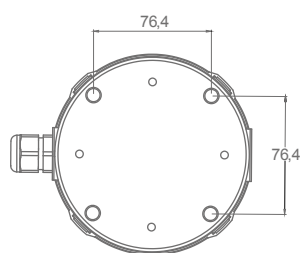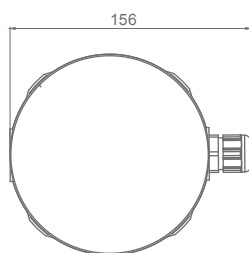

CE


SPACING DATA

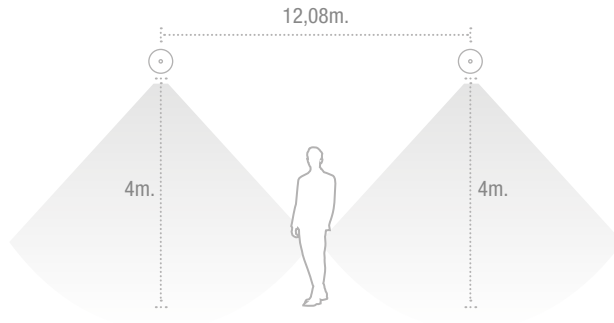

Position	Height		
	3,0	3,5	4,0
↔	4,39	4,62	4,80
↔	10,79	11,49	12,08

Interdistances calculated with 300 lm and $E_{min} = 1 lx$

PHOTOMETRIC CURVES

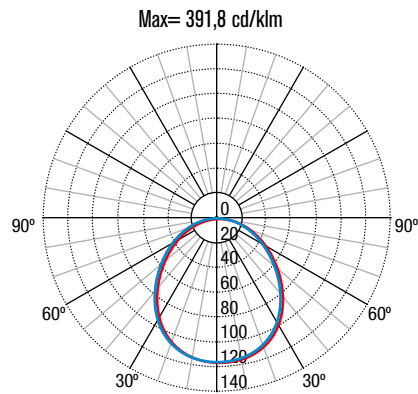

REFERENCES

lm	Type*	Dur	Battery (Units/Ah)	Selftest	Wireless
300	M/NM	1	3,2V 1,5Ah LFP	LUT3300LXP	LUT3300LDPW

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

For version in black colour, add an 'N' at the of the reference.