

SPAZIO RAIL



IP42

IK04

Lm
250
300

LED
4000°K


1h.

LiFePO₄



850°

DIMENSIONS

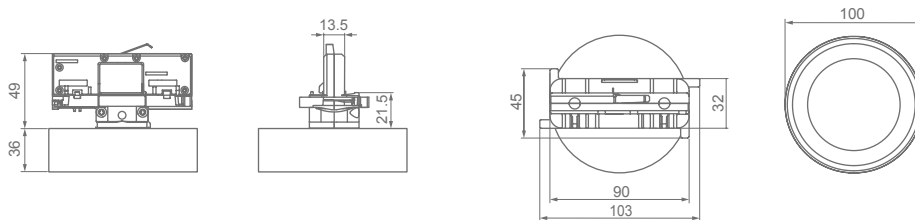

REFERENCES

lm	Type*	Dur	Battery (Units/Ah)	Selftest	Wireless
300	M/NM	1	3,2V 1,5Ah LFP	LUZ6300LXP	LUZ6300LDPW
250	M/NM	1	3,2V 1,5Ah LFP	LSP6255LXP	LSP6255LDPW

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

For version in black colour, add an 'N' at the of the reference.





ACCESSORIES SPAZIO RANGE



ALP0012
Asimetric



ALQ0011
Square recessed frame



ALC0011
Round recessed frame



ALE0065
Kit IP65



ALB0011
Signalling with
recessed round frame



ALX0011
Signalling with recessed
squared frame



ALT0011
Flexible input kit
for surface pipe



ALS0011
Signalling surface ceiling



ALP0011
Signalling surface wall