





IP40 IK04 LED 4000°K 1-3h. LiFePO<sub>4</sub> 850° 30m.

## AFMETINGEN · DIMENSIONS

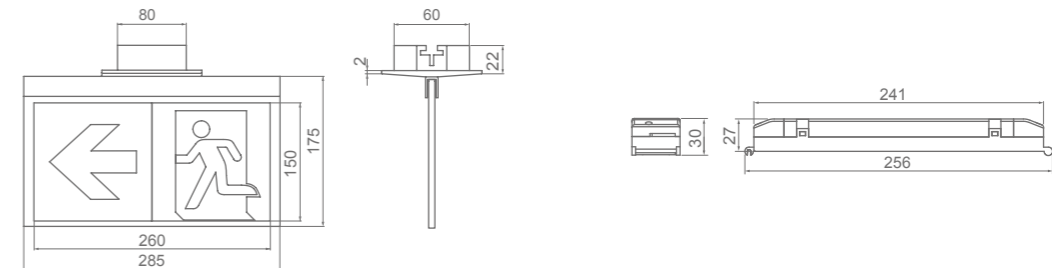

## HERKENNINGSAFSTAND · VISIBILITÉ

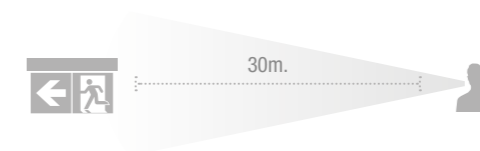

## REFERENTIES · RÉFÉRENCES

Herkenningsafstand Visibilité	Type* Type*	Autonomie Autonomie	Pictogram Pictogramme	Batterij (eenheden/ah) Batterie (unités/ah)	Zelftest Test automatique
30m	M	1	Right / Left	3,2V 0,8A/h LFP	LSS3045LXP
30m	M	1	Up / Down	3,2V 0,8A/h LFP	LSS3046LXP
30m	M	3	Right / Left	3,2V 1,5A/h LFP	LSS3045LXP3
30m	M	3	Up / Down	3,2V 1,5A/h LFP	LSS3046LXP3

\* M: permanent. De armatuur werkt te allen tijde op de normale of noodvoeding.

\* M: maintenu. Le luminaire fonctionne à partir de l'alimentation normale ou de secours en tout temps.



CE