

MAXILUM

IP65



IP65

IK07

1-3h.

LED
4000°K


Lm
1500
3300

LiFePO₄



-30°

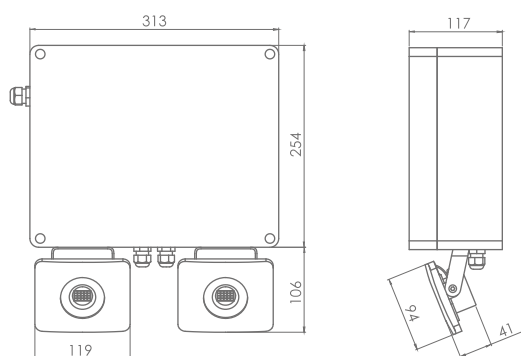


DIMENSIONES



INTERDISTANCIAS

Posición	Altura			
	6	8	10	12
	25,13	30,19	34,45	38,63
	12,34	14,21	15,46	16,35

Interdistancias calculadas con 3.300 lm y $E_{min} = 1 \text{ lx}$

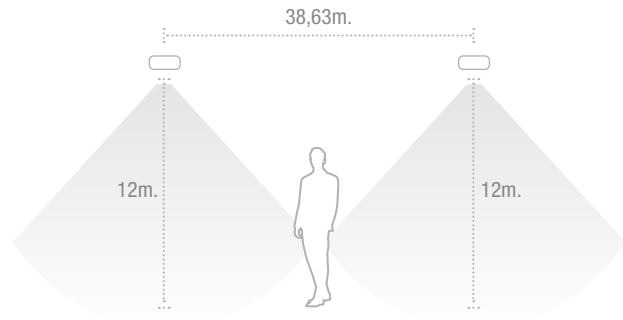

REFERENCIAS

lm	Tipo*	Aut. (h)	Batería	Estándar	PVR (€)	Autotest	PVR (€)	Wireless	PVR (€)
1500	NP	1	12,8V / 3Ah LFP	PME1500LC	325,13	PME1500LX	379,49	PME1500LDW	449,00
1500	NP	3	2 x 12,8V / 3Ah LFP	PME1500LC3	394,51	PME1500LX3	407,25	PME1500LD3W	477,75
2500	NP	2	2 x 12,8V / 3Ah LFP			PME2500LX2	458,35		
3250	NP	1	2 x 12,8V / 3Ah LFP	PME3000LC	391,00				
3300	NP	1	2 x 12,8V / 3Ah LFP			PME3000LX	455,92	PME3000LDW	528,15

BAJAS TEMPERATURAS *

lm	Tipo*	Aut. (h)	Batería	Autotest	PVR (€)	Wireless	PVR (€)
3300	NP	1	2 x 12,8V / 3Ah LFP	PME3000LXF	520,85	PME3000LDWF	595,39

*NP: funciona solo en caso de ausencia de red.



CURVAS FOTOMÉTRICAS

