


PFL



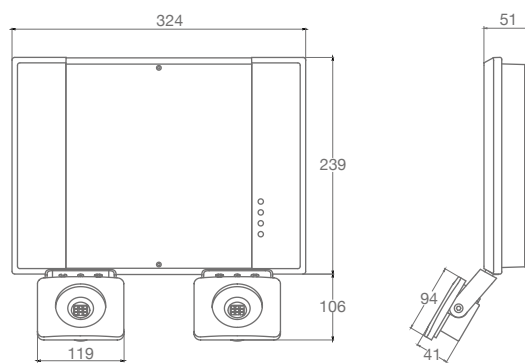

- IP42
- IK04
- 1h.
- LED 4000°K
- Lm 1500 3300
- Ni-Cd
- LiFePO₄
-
-
-
-

DIMENSIONES




CE

INTERDISTANCIAS

| Posición | Altura | | | |
|---|--------|-------|-------|-------|
| | 6 | 8 | 10 | 12 |
|  | 21,69 | 25,88 | 29,07 | 31,58 |
|  | 10,00 | 10,99 | 11,57 | 11,78 |

Interdistancias calculadas con 1.500 lm y $E_{min} = 1 \text{ lx}$

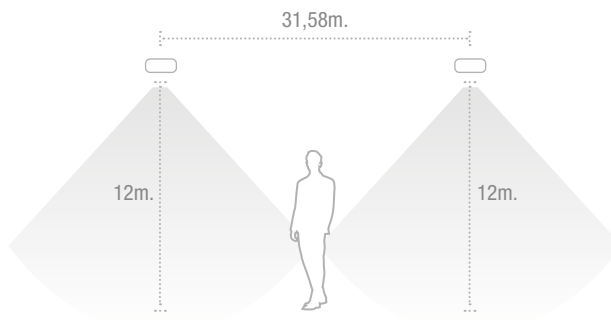

REFERENCIAS

| lm | Tipo* | Aut. (h) | Baterías (Uds./Ah) | Estándar | PVR (€) | Autotest | PVR (€) | Wireless | PVR (€) |
|------|-------|----------|---------------------|-----------|---------|-----------|---------|------------|---------|
| 1500 | NP | 1 | 12,8V / 3Ah LFP | PFL1500LC | 261,35 | PFL1500LX | 287,56 | PFL1500LDW | 342,60 |
| 3300 | NP | 1 | 2 x 12,8V / 3Ah LFP | PFL3000LC | 329,52 | PFL3000LX | 349,17 | PFL3000LDW | 375,20 |

*NP: funciona solo en caso de ausencia de red.



CURVAS FOTOMÉTRICAS

