











# EXITALYA Red

(Surface Wall Mounted)


Design by  
Ángel Díaz Cambronero

## SPECIFICATION

-  Polycarbonate body
-  Sign + Optics: Exit Sign + Circular Lens
- IP** IP20
- IK** IK04
- lm** 120 lm
-  Duration: 1 - 3 h · Battery: LFP
-  Charging time: 12 h
-  Supply: 230 V - 50 Hz
- LED** LED temperature: 4000 °K
-  Working temperature: 0 °C to +40 °C
-  AutoTest
-  Wireless addressable monitoring



## DIMENSIONS (mm)

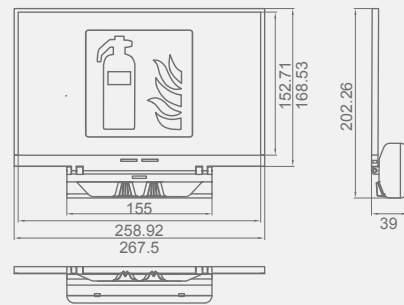

## VIEWING DISTANCE



## STANDARDS COMPLIANCE

EN-60598-2-22  
Pictographs: EN ISO7010  
AutoTest: EN-62034  
Wireless: ETSI EN 300 220  
DALI: EN 62386

## CERTIFICATIONS



RANGE

	Emergency	Mains	Type*	Dur.	Battery	Ref.
AutoTest	120 lm	70 lm	M/NM	1 h	3.2V 1.5A/h LFP	LYE3125LXP
	120 lm	70 lm	M/NM	3 h	3.2V 3.0A/h LFP	LYE3125LXP3
Wireless	120 lm	70 lm	M/NM	1 h	3.2V 1.5A/h LFP	LYE3125LDPW
	120 lm	70 lm	M/NM	3 h	3.2V 3.0A/h LFP	LYE3125LDP3W
DALI	120 lm	70 lm	M	1 h	3.2V 1.5A/h LFP	LYE3125LAP
	120 lm	70 lm	M	3 h	3.2V 3.0A/h LFP	LYE3125LAP3


\*M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.

\*M: Maintained.


For black version, add "N" at the end of the reference. Luminous flux decreases by 18% in black colour version.

ISOLUX CURVE

120 lm luminaire placed at 3 m height

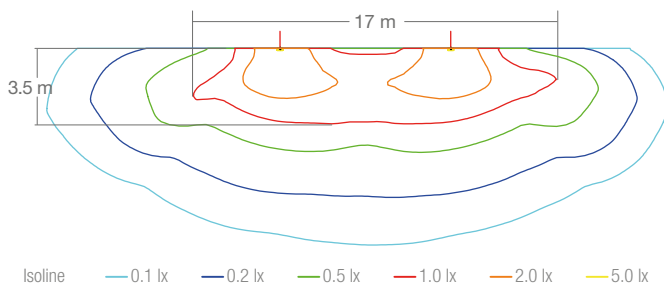

PHOTOMETRIC GUIDE

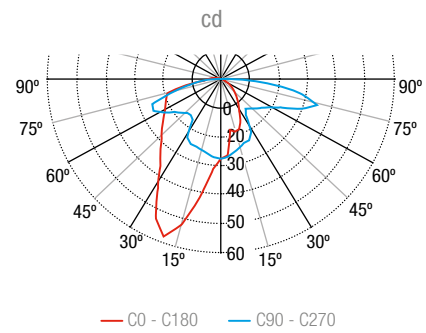

## 180° adaptable

Its specific design makes it an exign sign adaptable to any position on the surface where it is installed: ceiling, wall or sloping ceiling.

The banner is made of a very innovative self-diffusing material that provides a perfect and uniform diffusion of light.



It is supplied with a complete set of pictograms



1 unit x EEP410 1 unit x EEP411 1 unit x EEP412 1 unit x EEP406 (white)

