



 **IP 65**

Ingress Protection

1 2 3 4 5 6

Protection from Solids (dust, dirt...)

1 2 3 4 5 6 7 8 9

Protection from Liquids (water...)

Totally dust tight. Full protection against dust and other particles, including a vacuum seal, tested against continuous airflow. Protected against heavy seas or powerful jets of water.

 **IK 10**

Impact Rating

00 01 02 03 04 05 06 07 08 09 10

Impact Protection

Protected against 20 joules of impact (the equivalent to the impact of a 5kg mass dropped from 400mm above the impacted surface)

# SPAZIO HIGH BAY

## SPECIFICATION



Polycarbonate body



Diffuser: Transparent Polycarbonate

IP

IP65

IK

IK10

lm

680 lm



Duration: 1 h · Battery: LFP



Charging time: 24 h.



Supply: 230 V - 50 Hz

LED

LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C





AutoTest



AutoTest & WSS Lithium

## DIMENSIONS (mm)

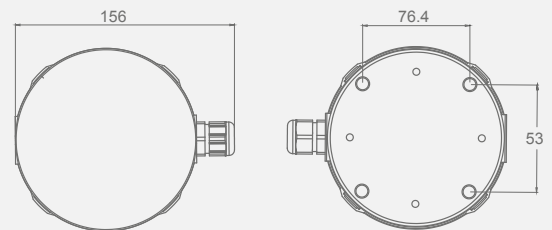

## STANDARDS COMPLIANCE

EN-60598-2-22  
AutoTest: EN-62034

## CERTIFICATIONS




RANGE

Emergency	Type*	Dur.	Battery	Ref.
AutoTest	680 lm	NM	1 h   6.4V 1.5A/h LFP	LUE4700LX

\*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.  
For version in black colour, add an 'N' at the end of the reference.


SPACING TABLE

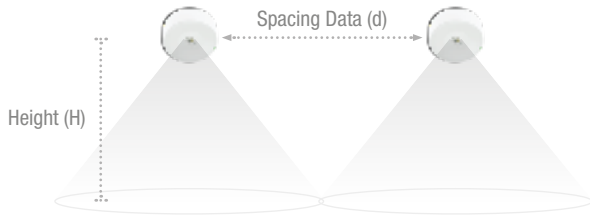

Spacing table calculated with 1 lux minimum illuminance

Height (H)	Spacing Data (d)
	<b>680 lm</b>
6 m	18.2 m
8 m	19.9 m
10 m	21.0 m
12 m	21.4 m
14 m	21.1 m

ISOLUX CURVE

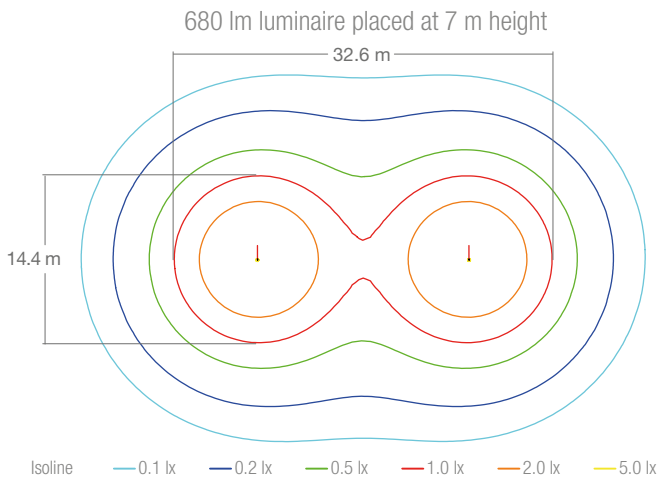

PHOTOMETRIC GUIDE

