



Real size



# SPAZIO PLUS




## SPECIFICATION

-  Polycarbonate body
-  Escape route lens  
Anti-panic lens  
Asymmetrical wall lens
- IP** IP42
- IK** IK04
- Im** 165 lm - 250 lm
-  Duration: 1 - 3 h · Battery: LFP
-  Charging time: 12 h
-  Supply: 230 V - 50 Hz
- LED** LED temperature: 4000 °K
-  Working temperature: 0 °C to +40 °C
-  AutoTest
-  Wireless addressable monitoring



AutoTest & WSS Lithium

## DIMENSIONS (mm)

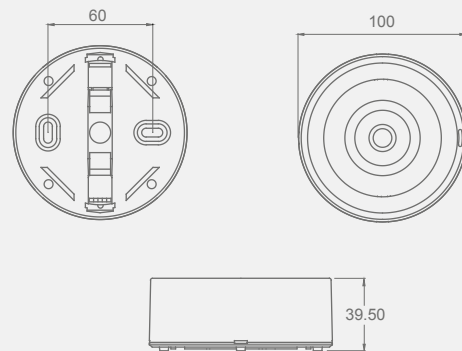

## STANDARDS COMPLIANCE

EN-60598-2-22  
AutoTest: EN-62034  
Wireless: ETSI EN 300 220  
DALI: EN 62386

## CERTIFICATIONS



RANGE

	Emergency	Mains	Type*	Dur.	Battery	Ref.
AutoTest	250 lm	150 lm	M/NM	1 h	3.2V 1.5A/h LFP	LSP3255LXP
	165 lm	100 lm	M/NM	3 h	3.2V 1.8A/h LFP	LSP3175LXP3
Wireless	250 lm	150 lm	M/NM	1 h	3.2V 1.5A/h LFP	LSP3255LDPW
	165 lm	100 lm	M/NM	3 h	3.2V 1.8A/h LFP	LSP3175LDP3W
DALI	250 lm	150 lm	M/NM	1 h	3.2V 1.5A/h LFP	LSP3255LAP
	165 lm	100 lm	M/NM	3 h	3.2V 1.8A/h LFP	LSP3175LAP3

\*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.  
 All references are supplied with antipanic and evacuation lens. For Asymmetrical wall lens, please request accessory ALP0012.

For version in black colour, add an 'N' at the end of the reference.

SPACING TABLE

ESCAPE ROUTE LENS




Spacing table calculated with 1 lux minimum illuminance

Height (H)	Spacing Data (d)	
	165 lm	250 lm
2.5 m	18.5 m	20.0 m
3 m	20.8 m	22.4 m
4 m	24.8 m	26.9 m
5 m	26.2 m	30.9 m
6 m	24.7 m	32.0 m


ISOLUX CURVE

250 lm luminaire placed at 3 m height

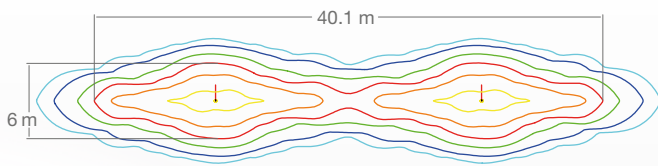

Isoline — 0.1 lx — 0.2 lx — 0.5 lx — 1.0 lx — 2.0 lx — 5.0 lx

PHOTOMETRIC GUIDE

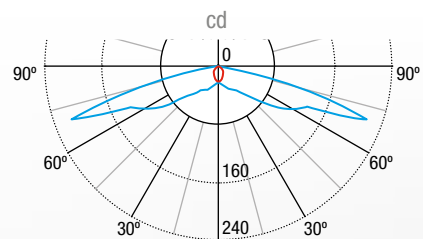


— C0 - C180 — C90 - C270

# SPAZIO PLUS

ZEMPER

## ANTI-PANIC LENS


Spacing table calculated with 0.5 lux minimum illuminance

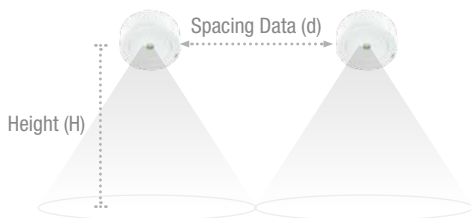

Height (H)	Spacing Data (d)	
	165 lm	250 lm
2.5 m	9.7 m	10.4 m
3 m	10.8 m	11.7 m
4 m	12.9 m	14.0 m
5 m	14.6 m	16.0 m
6 m	15.9 m	17.7 m


### ISOLUX CURVE

250 lm luminaire placed at 3 m height

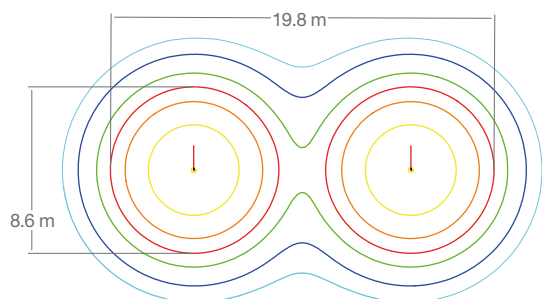

Isoline — 0.1 lx — 0.2 lx — 0.5 lx — 1.0 lx — 2.0 lx — 5.0 lx

### PHOTOMETRIC GUIDE

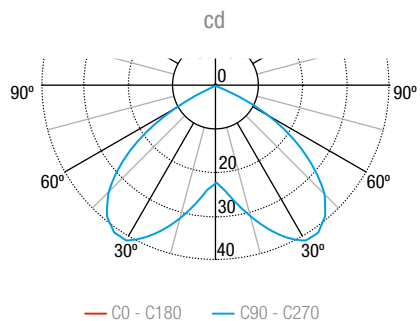

## ASYMMETRICAL WALL LENS


Spacing table calculated with 1 lux minimum illuminance



Height (H)	Spacing Data (d)	
	165 lm	250 lm
2.5 m	9.0 m	10.1 m
3 m	9.7 m	11.0 m
3.5 m	10.2 m	11.7 m
4 m	10.6 m	12.3 m
4.5 m	10.9 m	12.8 m


### ISOLUX CURVE

250 lm luminaire placed at 3 m height

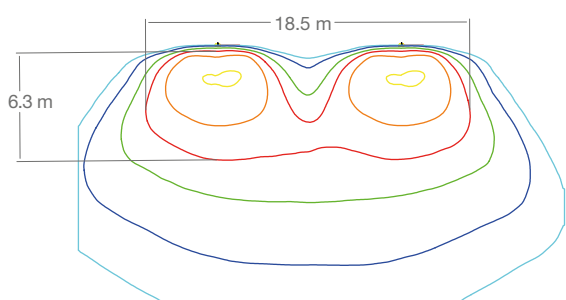

Isoline — 0.1 lx — 0.2 lx — 0.5 lx — 1.0 lx — 2.0 lx — 5.0 lx

### PHOTOMETRIC GUIDE

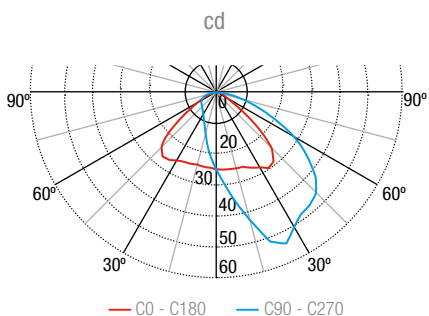




ACCESSORIES

INTERCHANGEABLE LENS



Supplied with luminaire  
ANTI-PANIC LENS and ESCAPE ROUTE LENS



ALP0012  
ASYMMETRICAL WALL LENS