















T·LED·


SPECIFICATION

-  Polycarbonate body
-  Diffuser: Transparent Polycarbonate
-  IP42
-  IK04
-  100 lm - 800 lm
-  Duration: 1 - 3 h · Battery: LFP
-  Charging time: 12 h
-  Supply: 230 V - 50 Hz
-  LED temperature: 4000 °K
-  Working temperature: 0 °C to +40 °C
-  AutoTest
-  Wireless addressable monitoring



AutoTest & WSS Lithium

DIMENSIONS (mm)

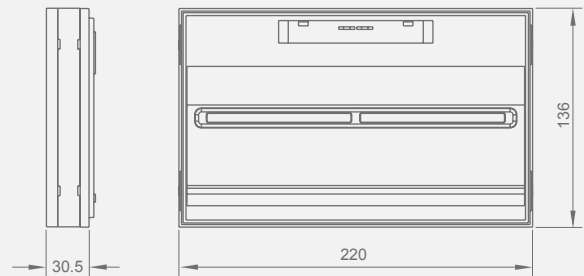

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
Wireless: ETSI EN 300 220

CERTIFICATIONS



		RANGE					
	Emergency	Mains	Type*	Dur.	Battery	Ref.	
AutoTest	100 lm	60 lm	M/NM	1 h	3.2V 0.5A/h LFP	LTS4100LXP	
	440 lm	260 lm	M/NM	1 h	3.2V 1.5A/h LFP	LTS4400LXP	
	800 lm	400 lm	M/NM	1 h	6.4V 1.5A/h LFP	LTS4800LXP	
	250 lm	150 lm	M/NM	3 h	3.2V 3.0A/h LFP	LTS4300LXP3	
Wireless	100 lm	60 lm	M/NM	1 h	3.2V 0.5A/h LFP	LTS4100LDPW	
	440 lm	260 lm	M/NM	1 h	3.2V 1.5A/h LFP	LTS4400LDPW	
	800 lm	400 lm	M/NM	1 h	6.4V 1.5A/h LFP	LTS4800LDPW	
	250 lm	150 lm	M/NM	3 h	3.2V 3.0A/h LFP	LTS4300LDP3W	

*M/NM: Maintained/Non Maintained. Same working as Maintained luminaire, with a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.
For version in black colour, add an 'N' at the end of the reference.

SPACING TABLE




Spacing table calculated with 1 lux minimum illuminance

Height (H)	Spacing Data (d)		
	100 lm	440 lm	800 lm
2.5 m	7.5 m	11.6 m	
3 m	7.9 m	12.5 m	
4 m	8.3 m	14.1 m	
5 m	8.2 m	15.4 m	
6 m	7.7 m	16.3 m	19.9 m
8 m			21.9 m
10 m			23.1 m
12 m			23.5 m
14 m			23.3 m


ISOLUX CURVE

440 lm luminaire placed at 3 m height

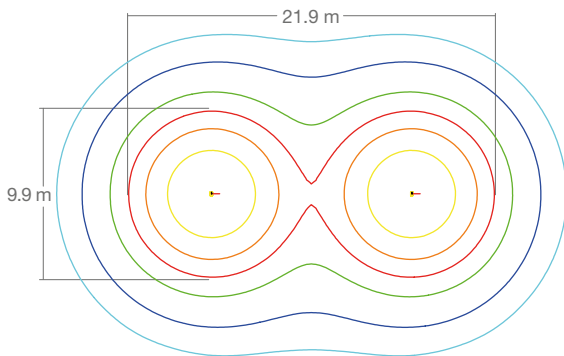

Isoline — 0.1 lx — 0.2 lx — 0.5 lx — 1.0 lx — 2.0 lx — 5.0 lx

PHOTOMETRIC GUIDE

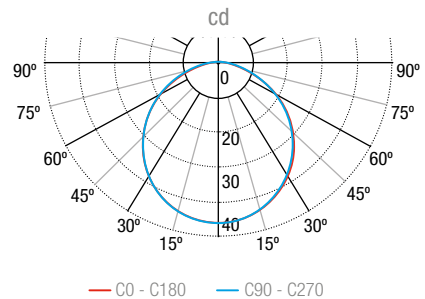

ACCESSORIES

Digital printed legend panel kit for surface ceiling mounted.

- ABT1781
- ABT1781
- ABT1881
- ABT1981

Accessories for recessed mounted into ceiling (while colour) and digital printed legend panel

- ABX1781
- ABX1781
- ABX1881
- ABX1981

AGT000 Protective grille

AET0081 Metallic box for wall recessed mounted

AMT0081 Accessories for ceiling recessed mounted (white colour)

APT316 Modular self-adhesive signalling pictogram set with 4 arrows

*For wall recess option it is necessary to order AET0081+AMT00(x)1