



# EXITALYA Recessed

(Recessed Wall Mounted & Ceiling Recessed Mounted)

Design by  
Ángel Díaz Cambronero

## SPECIFICATION



Polycarbonate body

IP

IP20

IK

IK04



Duration: 1 - 3 h · Battery: LFP



Charging time: 12 h



Supply: 230 V - 50 Hz

LED

LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C




AutoTest



Wireless addressable monitoring



## VIEWING DISTANCE



## STANDARDS COMPLIANCE

EN-60598-2-22

Pictographs: EN ISO7010

AutoTest: EN-62034

Wireless: ETSI EN 300 220


Dali: EN 62386




AutoTest & WSS Lithium

## DIMENSIONS (mm)


Recessed  
Wall  
Mounted

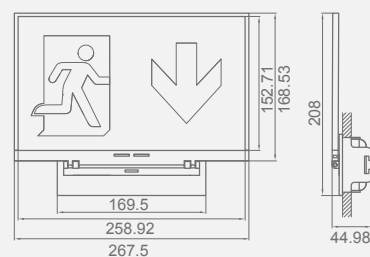

Ceiling  
Recessed  
Mounted

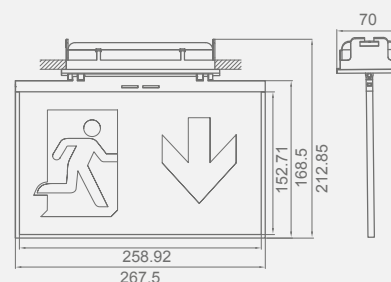

## CERTIFICATIONS



RANGE

	Type*	Dur.	Battery	Ref.
AutoTest	M	1 h	3.2V 1.0A/h LFP	LYR3070LXP
	M	3 h	3.2V 1.5A/h LFP	LYR3070LXP3
Wireless	M	1 h	3.2V 1.0A/h LFP	LYR3070LDPW
	M	3 h	3.2V 1.5A/h LFP	LYR3070LDP3W
DALI	M	1 h	3.2V 1.0A/h LFP	LYR3070LAP
	M	3 h	3.2V 1.5A/h LFP	LYR3070LAP3

\*M: Maintained.



## 180° adaptable

Its specific design makes it an exign sign adaptable to any position on the surface where it is installed: ceiling, wall or sloping ceiling.

The banner is made of a very innovative self-diffusing material that provides a perfect and uniform diffusion of light.



It is supplied with a complete set of pictograms



1 unit x EEP407



1 unit x EEP408



2 units x EEP409



1 unit x EEP406 (white)