



# EXITALYA Surface

(Surface Ceiling Mounted & Surface Wall Mounted)

Design by  
Ángel Díaz Cambronero

## SPECIFICATION



Polycarbonate body

IP

IP20

IK

IK04



Duration: 1 - 3 h · Battery: LFP



Charging time: 12 h



Supply: 230 V - 50 Hz

LED

LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C



AutoTest



Wireless addressable monitoring



## STANDARDS COMPLIANCE

EN-60598-2-22

Pictographs: EN ISO7010

AutoTest: EN-62034


Wireless: ETSI EN 300 220

Dali: EN 62386



AutoTest & WSS Lithium

## DIMENSIONS (mm)

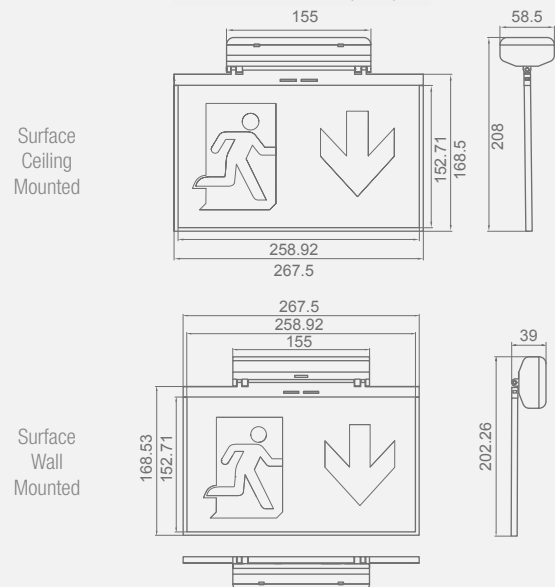

## VIEWING DISTANCE



## CERTIFICATIONS





RANGE

	Type*	Dur.	Battery	Ref.
AutoTest	M	1 h	3.2V 1.0A/h LFP	LYE3070LXP
	M	3 h	3.2V 1.5A/h LFP	LYE3070LXP3
Wireless	M	1 h	3.2V 1.0A/h LFP	LYE3070LDPW
	M	3 h	3.2V 1.5A/h LFP	LYE3070LDP3W
DALI	M	1 h	3.2V 1.0A/h LFP	LYE3070LAP
	M	3 h	3.2V 1.5A/h LFP	LYE3070LAP3

\*M: Maintained.



Wall mounted



Recessed mounted



Ceiling mounted

## 180° adaptable

Its specific design makes it an exign sign adaptable to any position on the surface where it is installed: ceiling, wall or sloping ceiling.

The banner is made of a very innovative self-diffusing material that provides a perfect and uniform diffusion of light.



It is supplied with a complete set of pictograms



1 unit x EEP407



1 unit x EEP408



2 units x EEP409



1 unit x EEP406 (white)