



KONS

SPECIFICATION



Polycarbonate body

IP

IP42

IK

IK04



Duration: 1 - 3 h · Battery: LFP



Charging time: 12 h



Supply: 230 V - 50 Hz

LED

LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C



AutoTest



Wireless addressable monitoring




WARRANTY


5
YEAR

AutoTest & WSS Lithium

DIMENSIONS (mm)

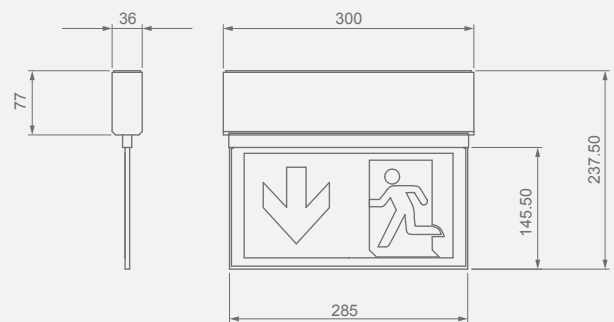

VIEWING DISTANCE



STANDARDS COMPLIANCE

EN-60598-2-22
 Pictographs: EN ISO7010
 AutoTest: EN-62034
 Wireless: ETSI EN 300 220
 Dali: EN 62386

CERTIFICATIONS



		RANGE		
	Type*	Dur.	Battery	Ref.
AutoTest	M	1 h	3.2V 1.0A/h LFP	LKS3070LXP
	M	3 h	3.2V 1.5A/h LFP	LKS3070LXP3
Wireless	M	1 h	3.2V 1.0A/h LFP	LKS3070LDPW
	M	3 h	3.2V 1.5A/h LFP	LKS3070LDP3W
DALI	M	1 h	3.2V 1.0A/h LFP	LKS9070LAP
	M	3 h	3.2V 1.5A/h LFP	LKS9070LAP3

*M: Maintained.

ACCESSORIES

It is supplied with a complete set of pictograms



1 unit x EEP032



2 units x EEP030



1 unit x EEP033

