















Surface

Real size

WALYA

Design by
Ángel Díaz Cambrero


SPECIFICATION

-  Polycarbonate body
-  Optics: Circular Lens + Hall Lens
-  IP20
-  IK04
-  150 lm - 300 lm
-  Duration: 1 - 3 h · Battery: LFP
-  Charging time: 12 h
-  Supply: 230 V - 50 Hz
-  LED temperature: 4000 °K
-  Working temperature: 0 °C to +40 °C
-  AutoTest
-  Wireless addressable monitoring



AutoTest & WSS Lithium

DIMENSIONS (mm)

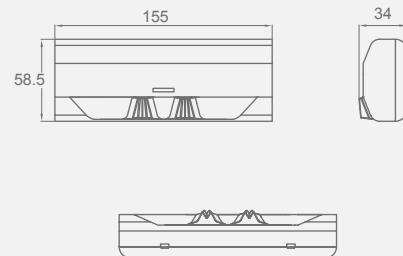

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
Wireless: ETSI EN 300 220
DALI: EN 62386

CERTIFICATIONS




RANGE

	Emergency	Mains	Type*	Dur.	Battery	Ref.
AutoTest	300 lm		NM	1 h	3.2V 1.5A/h LFP	LYW3300LX
	150 lm		NM	3 h	3.2V 1.5A/h LFP	LYW3150LX3
Wireless	300 lm	180 lm	M/NM	1 h	3.2V 1.5A/h LFP	LYW3300LDPW
	300 lm		NM	1 h	3.2V 1.5A/h LFP	LYW3300LDW
	150 lm		NM	3 h	3.2V 1.5A/h LFP	LYW3150LD3W
DALI	300 lm	180 lm	M/NM	1 h	3.2V 1.5A/h LFP	LYW3300LAP
	150 lm	90 lm	M/NM	3 h	3.2V 1.5A/h LFP	LYW3150LAP3

*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.
 *M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.
 For black version, add "N" at the end of the reference. Luminous flux decreases by 18% in black colour version.


SPACING TABLE

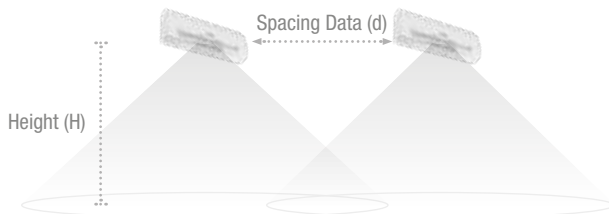

Spacing table calculated with 1 lux minimum illuminance

Height (H)	Spacing Data (d)	
	150 lm	300 lm
2.5 m	8.9 m	12.8 m
3 m	8.4 m	12.9 m
3.5 m	7.7 m	12.7 m
4 m	7.0 m	12.2 m
4.5 m	6.7 m	11.6 m

ISOLUX CURVE

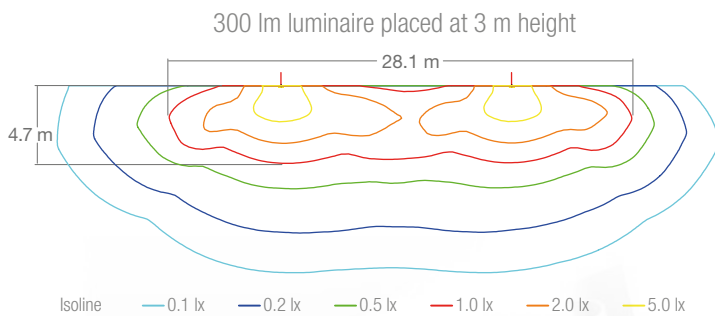

PHOTOMETRIC GUIDE

