

# CORKIA SUPRA

## LCF3406LX

Taric 9405114090



### Technical Standards

EN-60598-1, EN-60598-2-22, EN-62034

### Certifications



### Functional Specifications

	Self-Contained
	Control system: AutoTest
	AutoTest: Yes
	Type: Non-maintained
	Supply: 230V 50Hz<0.6W
	Non-maintained mode consumption: 0.6 W
	Emergency: 380 lm
	Duration: 1 h Battery: 6.4V-3.0Ah LiFePO <sub>4</sub>
	Charging time: 12 h

### Mechanical and Aesthetic Specifications

	Mounting: Wall Surface
	Insulation: Class II
	IP20
	IK04
	Lamp: 1 x LED 4W
	LED color temperature: 4000 K
	Body material: Cork
	Finish: Brown Cork
	Diffuser / Optics: Polycarbonate wall asymmetric lens
	Working temperature: 0 / 40 °C
	Suitable for flammable surface: Yes



# CORKIA SUPRA LCF3406LX

## Installation characteristics

Installation with preplate.

Possibility of installation:

- Wall surface

Possibility of connection:

- Embedded wiring

Special lighting for corridors and landings.



## Operating characteristics

The luminaire has a built-in button, which allows:

- Put on Standby without power supply.

Microprocessor controlled luminaire that performs periodic and automatic tests.








Functional test every **7 days**.




Duration test every **365 days**.

The test result is shown in the status indicator LEDs.

The luminaire has status LEDs, which indicates:

-  Green on: correct operation
-  Orange on: incorrect battery or duration
-  Both leds off: no power supply or total failure of the luminaire
-  Green flashing: test in progress
-  Orange flashing: functional failure

## Spacing table

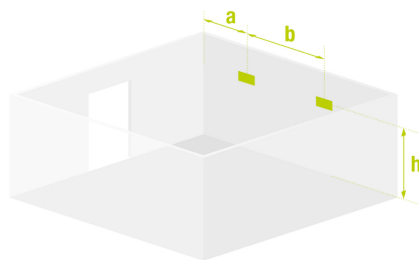

h	a	b
2.5 m	4,1 m	8,0 m
3 m	4,1 m	9,1 m
3.5 m	1,1 m	9,1 m
4 m	-	5,7 m
4.5 m	-	4,8 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

## Photometric guide

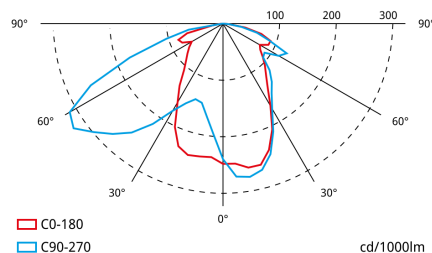

# CORKIA SUPRA LCF3406LX

## Weight (kg)



Product weight:  
0.48 kg



## Dimensions (mm)

