

CORKIA SPACE

LCR3403LW SmartZ®

Taric 9405114090



Technical Standards

EN-60598-1, EN-60598-2-22, EN-62034, EN-303-446-1

Certifications




Functional Specifications

Mechanical and Aesthetic Specifications

	Self-Contained
	Control system: Wireless SmartZ®
	AutoTest: Yes
	Type: Non-maintained
	Supply: 230V 50Hz<0.6W
	Non-maintained mode consumption: 0.6 W
	Emergency: 380 lm
	Duration: 1 h Battery: 6.4V-1.5Ah LiFePO ₄
	Charging time: 12 h

	Mounting: Ceiling Recessed
	Insulation: Class II
	IP44
	IK04
	Lamp: 1 x LED 4W
	LED color temperature: 4000 K
	Body material: Cork
	Finish: Brown Cork
	Diffuser / Optics: Corner Polycarbonate Lens
	Working temperature: 0 / 40 °C
	Suitable for flammable surface: Yes



CORKIA SPACE LCR3403LW

Installation characteristics

Luminaires made up of a spotlight + electrical equipment + batteries

Installation type:

- Recessed ceiling.

Optics designed for changes of direction in corridors

Double spring clips installation method.

Cables between different halogen-free elements.



Operating characteristics

This luminaire is compatible with the SmartZ® intelligent emergency lighting management system, designed to facilitate maintenance and installation control. Thanks to its 2.4 GHz wireless communication capability, it creates a dynamic mesh network that allows the connection of more than 10,000 luminaires without the need for any additional wiring.

The system simplifies real-time monitoring by issuing automated alerts in case of potential failures, eliminating the need for any manual inspections.

Additionally, it has the facility to integrate with other systems, both wired and wireless.

If not connected to the mesh network, the luminaire will default and operate in Autotest mode, automatically performing the detailed tests listed below.

Microprocessor controlled luminaire that performs periodic and automatic tests.








Functional test every **7 days**.



Duration test every **365 days**.

The test result is shown in the status indicator LEDs.

The luminaire has status LEDs, which indicates:

- | | | |
|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Green on: correct operation |  Orange on: incorrect battery or duration |  Both leds off: no power supply or total failure of the luminaire |
|  Green flashing: test in progress |  Orange flashing: functional failure | |


Accessories



CSZ003
SMARTZ CONTROL UNIT+ UPS
CSZ002+SAI002

CORKIA SPACE LCR3403LW

Spacing table

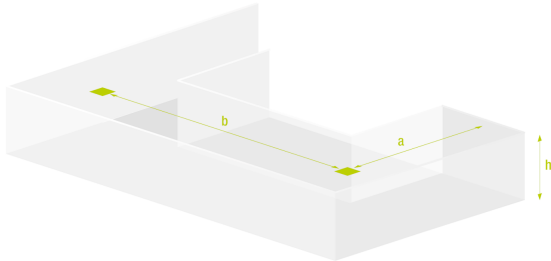

h	a	b
2 m	4,4 m	16,7 m
2.5 m	4,9 m	18,6 m
3 m	5,3 m	19,8 m
4 m	5,8 m	21,4 m
5 m	5,9 m	18,4 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

Photometric guide

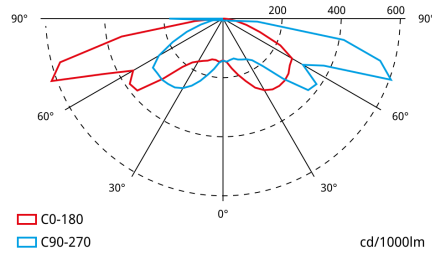

CORKIA SPACE LCR3403LW

Weight (kg)



Product weight:

0.28 kg

Boxed product weight:

0.31 kg

Weight of box of 15 units:

4.89 kg



Dimensions (mm)

