

# CORKIA SPACE

## LCR3403LX

Taric 9405114090



WARRANTY


5 YEAR



## Technical Standards

EN-60598-1, EN-60598-2-22, EN-62034

## Certifications

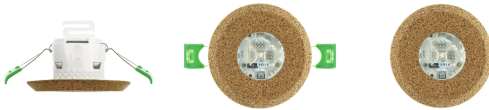

## Functional Specifications

	Self-Contained
	Control system: AutoTest
	AutoTest: Yes
	Type: Non-maintained
	Supply: 230V 50Hz<0.6W
	Non-maintained mode consumption: 0.6 W
	Emergency: 380 lm
	Duration: 1 h Battery: 6.4V-1.5Ah LiFePO <sub>4</sub>
	Charging time: 12 h

## Mechanical and Aesthetic Specifications

	Mounting: Ceiling Recessed
	Insulation: Class II
	IP44
	IK04
	Lamp: 1 x LED 4W
	LED color temperature: 4000 K
	Body material: Cork
	Finish: Brown Cork
	Diffuser / Optics: Corner Polycarbonate Lens
	Working temperature: 0 / 40 °C
	Suitable for flammable surface: Yes



# CORKIA SPACE LCR3403LX

## Installation characteristics

Luminaires made up of a spotlight + electrical equipment + batteries

Installation type:

- Recessed ceiling.

Optics designed for changes of direction in corridors

Double spring clips installation method.

Cables between different halogen-free elements.



## Operating characteristics

The luminaire has a built-in button, which allows:

- Put on Standby without power supply.

Microprocessor controlled luminaire that performs periodic and automatic tests.



Functional test every **7 days**.




Duration test every **365 days**.

The test result is shown in the status indicator LEDs.

The luminaire has status LEDs, which indicates:

- |  |                                  |  |  |  |  |
|--|----------------------------------|--|--|--|--|
|  | Green on: correct operation      |  | Orange on: incorrect battery or duration |  | Both leds off: no power supply or total failure of the luminaire |
|  | Green flashing: test in progress |  | Orange flashing: functional failure      |  |  |

## Spacing table

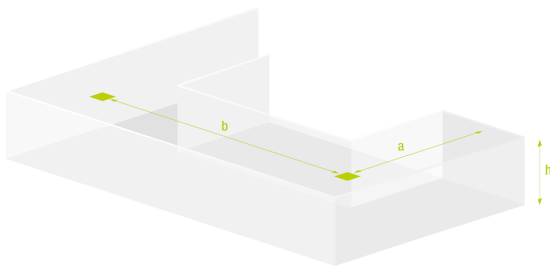

h	a	b
2 m	4,4 m	16,7 m
2.5 m	4,9 m	18,6 m
3 m	5,3 m	19,8 m
4 m	5,8 m	21,4 m
5 m	5,9 m	18,4 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

## Photometric guide

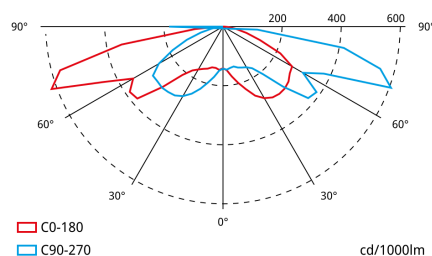

# CORKIA SPACE LCR3403LX

## Weight (kg)



Product weight:

0.28 kg

Boxed product weight:

0.31 kg

Weight of box of 15 units:

4.89 kg

## Dimensions (mm)

