

# CORKIA SPACE

## LCR3404LA

Taric 9405114090



WARRANTY


5 YEAR



### Technical Standards

EN-60598-1, EN-60598-2-22, EN-62034, EN-62386

### Certifications

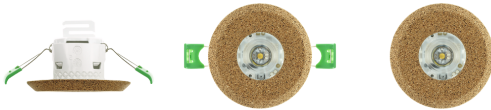

### Functional Specifications

### Mechanical and Aesthetic Specifications

	Self-Contained
	Control system: DALI2
	AutoTest: Yes
	Data Bus: Yes
	Type: Non-maintained
	Supply: 230V 50Hz<0.6W
	Non-maintained mode consumption: 0.6 W
	Emergency: 400 lm
	Duration: 1 h Battery: 6.4V-1.5Ah LiFePO <sub>4</sub>
	Charging time: 12 h

	Mounting: Ceiling Recessed
	Insulation: Class II
	IP44
	IK04
	Lamp: 1 x LED 4W
	LED color temperature: 4000 K
	Body material: Cork
	Finish: Brown Cork
	Diffuser / Optics: Narrow Polycarbonate Lens
	Working temperature: 0 / 40 °C
	Suitable for flammable surface: Yes



# CORKIA SPACE LCR3404LA

## Installation characteristics

Luminaires made up of a spotlight + electrical equipment + batteries

Installation type:

- Recessed ceiling.

Optics designed for high-bay

Double spring clips installation method.

Cables between different halogen-free elements.



## Operating characteristics

Bus available for DALI2 communication.

Microprocessor controlled luminaire that performs periodic and automatic tests.








Functional test every **7 days**.



Duration test every **365 days**.

The test result is shown in the status indicator LEDs.

The luminaire has status LEDs, which indicates:

- |   |  |  |
|---|--|--|
|  Green on: correct operation      |  Orange on: incorrect battery or duration |  Both leds off: no power supply or total failure of the luminaire |
|  Green flashing: test in progress |  Orange flashing: functional failure      |  |

## Accessories



ZWEBDALI2  
CENTRAL DALI2

# CORKIA SPACE LCR3404LA

## Spacing table



h	a	b	c	d
<b>6 m</b>	5,1 m	10,5 m	4,8 m	10,5 m
<b>8 m</b>	5,7 m	12,0 m	5,7 m	12,5 m
<b>11 m</b>	6,9 m	14,5 m	6,6 m	14,5 m
<b>13 m</b>	7,5 m	15,5 m	7,2 m	16,0 m
<b>15 m</b>	8,1 m	17,0 m	7,8 m	17,0 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 0.5 lux (anti-panic calculation).

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

## Photometric guide

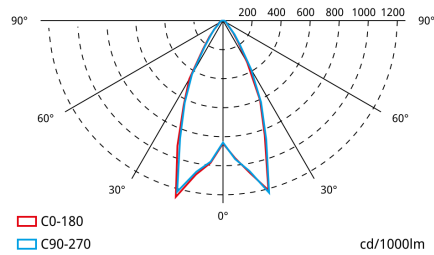

# CORKIA SPACE LCR3404LA

## Weight (kg)



Product weight:

0.28 kg

Boxed product weight:

0.31 kg

Weight of box of 15 units:

4.89 kg



## Dimensions (mm)

