

# SPAZIO PLUS TRACK

## LSP6255LAP

Taric 9405114090



### Technical Standards

EN-60598-1, EN-60598-2-22, EN-62034

### Certifications



### Functional Specifications

	Self-Contained
	Control system: DALI2
	AutoTest: Yes
	Data Bus: Yes
	Type: Non-maintained / Maintained via switch-link
	Supply: 230V 50Hz<2.6W
	Non-maintained mode consumption: 0.9 W Maintained mode consumption: 2.5 W
	Emergency: 250 lm Mains: 150 lm
	Duration: 1 h Battery: 3.2V-1.5Ah LiFePO <sub>4</sub>
	Charging time: 12 h

### Mechanical and Aesthetic Specifications

	Mounting: Electrified Rail
	Insulation: Class II
	IP20
	IK04
	Lamp: 1 x LED 3W
	LED color temperature: 4000 K
	Body material: Polycarbonate
	Finish: White RAL9003
	Diffuser / Optics: Polycarbonate anti-panic lens + escape route lens
	Working temperature: 0 / 40 °C
	Suitable for flammable surface: Yes



# SPAZIO PLUS TRACK LSP6255LAP

## Installation characteristics

Installation type:

- Electrical rail: Compatible with ONETRACK UL 3 circuits
- Compatible with EUROSTANDARD tracks



## Operating characteristics

Bus available for DALI communication.

Microprocessor controlled luminaire that performs periodic and automatic tests.



Functional test every **7 days**.



Duration test every **365 days**.

The test result is shown in the status indicator LEDs.

The luminaire has status LEDs, which indicates:


- |  |                                  |  |  |  |  |
|--|----------------------------------|--|--|--|--|
|  | Green on: correct operation      |  | Orange on: incorrect battery or duration |  | Both leds off: no power supply or total failure of the luminaire |
|  | Green flashing: test in progress |  | Orange flashing: functional failure      |  |  |

## Accessories



ZWEBDALI2  
CENTRAL DALI2

## Spacing table

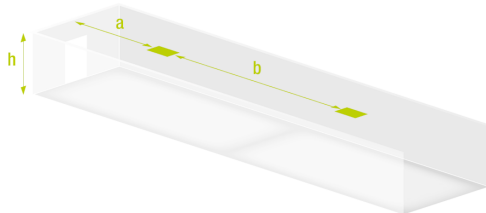


### Escape route lens

h	a	b
2 m	8,1 m	19,2 m
2.5 m	9,4 m	22,2 m
3 m	10,3 m	25,0 m
4 m	5,9 m	26,5 m
5 m	4,1 m	25,5 m

Spacing data calculated with no reflections and a maintenance factor of 0.9.  
Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.  
The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

# SPAZIO PLUS TRACK LSP6255LAP

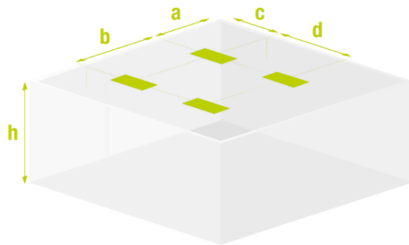

Anti-panic lens				
h	a	b	c	d
2 m	3,6 m	7,0 m	3,6 m	7,0 m
2.5 m	4,2 m	8,0 m	4,2 m	8,5 m
3 m	4,8 m	9,0 m	4,8 m	9,0 m
4 m	5,7 m	11,0 m	5,7 m	11,0 m
5 m	6,3 m	12,5 m	6,3 m	13,0 m



Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 0.5 lux (anti-panic calculation).

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

## Photometric guide

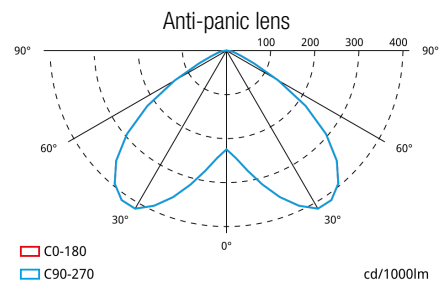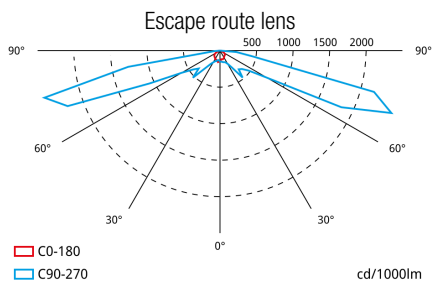

## Weight (kg)



Product weight:

0.28 kg

Boxed product weight:

0.31 kg

Weight of box of 37 units:

11.86 kg



## Dimensions (mm)

