

SPAZIO R

LSR318023

Taric 9405114090



Technical Standards

EN-60598-1, EN-60598-2-22

Certifications



Functional Specifications

- Central Battery System (CBS)
- Supply: 230Vac/dc<4.4W
- Maintained mode consumption: 4.4 W
- Emergency: 200 lm
Mains: 200 lm

Mechanical and Aesthetic Specifications

- Mounting: Ceiling Recessed
- Insulation: Class II
- IP42
- IK04
- Lamp: 1 x LED 3W
- LED color temperature: 4000 K
- Body material: Polycarbonate
- Finish: White RAL9003
- Diffuser / Optics: Polycarbonate Anti-panic Lens
- Working temperature: -20 / 40 °C
- Suitable for flammable surface: Yes



SPAZIO R LSR318023

Installation characteristics

Luminaire made up of a spotlight + electrical equipment with batteries

Installation type:

- Recessed ceiling.

Double spring clips installation method.



Operating characteristics

Luminaire of the type: Centralized.

Valid to be supply in the following ways:

- Directly at rated voltage.
- By means of a centralized power supply unit at the nominal voltage (consult possible options).


Accessories




ABX1741
ACC. PANEL REC. SPAZIO
PRINTING-RIGHT/LEFT 2-SIDED




ABX1841
ACC. PANEL REC. SPAZIO
PRINTING-UP 2-SIDED



AMU8002
ACC. FRAME REC. SPAZIO
UNIVERSAL - WHITE




ABX1941
ACC. PANEL REC. SPAZIO
PRINTING-DOWN 2-SIDED




AMU8003
ACC. FRAME REC. SPAZIO
UNIVERSAL BIG HOLE - WHITE



ABX5441
ACC. PANEL REC. SPAZIO
PRINTING-LEFT SINGLE-SIDED



ABX5541
ACC. PANEL REC. SPAZIO
PRINTING-RIGHT SINGLE-SIDED



ABX5741
ACC. PANEL REC. SPAZIO
PRINTING-DOWN SINGLE-SIDED



ABX5841
ACC. PANEL REC. SPAZIO
PRINTING-UP SINGLE-SIDED

SPAZIO R LSR318023

Spacing table



h	a	b	c	d
2 m	5,1 m	10,0 m	5,1 m	10,0 m
2.5 m	5,7 m	11,5 m	5,7 m	11,5 m
3 m	6,0 m	12,5 m	6,0 m	12,5 m
4 m	6,9 m	14,5 m	6,9 m	14,5 m
5 m	7,5 m	16,0 m	7,5 m	16,5 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 0.5 lux (anti-panic calculation).

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

Photometric guide

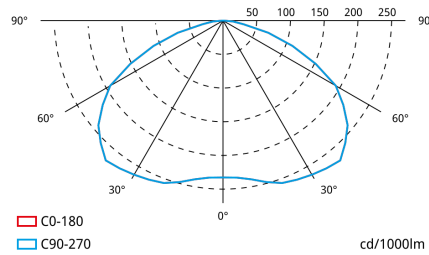

Weight (kg)



Product weight:

0.19 kg

Boxed product weight:

0.27 kg

Weight of box of 12 units:

3.48 kg

Dimensions (mm)

