

# SPAZIO R

## LSR318123N

Taric 9405114090



### Technical Standards

EN-60598-1, EN-60598-2-22

### Certifications



### Functional Specifications

- Central Battery System (CBS)
- Supply: 230Vac/dc<4.4W
- Maintained mode consumption: 4.4 W
- Emergency: 170 lm  
Mains: 170 lm

### Mechanical and Aesthetic Specifications

- Mounting: Ceiling Recessed
- Insulation: Class II
- IP42
- IK04
- Lamp: 1 x LED 3W
- LED color temperature: 4000 K
- Body material: Polycarbonate
- Finish: Black RAL9005
- Diffuser / Optics: Polycarbonate Escape Route Lens
- Working temperature: -20 / 40 °C
- Suitable for flammable surface: Yes



# SPAZIO R LSR318123N

## Installation characteristics

Luminaire made up of a spotlight + electrical equipment with batteries

Installation type:

- Recessed ceiling.

Double spring clips installation method.




## Operating characteristics

Luminaire of the type: Centralized.


Valid to be supply in the following ways:

- Directly at rated voltage.
- By means of a centralized power supply unit at the nominal voltage (consult possible options).

## Accessories



AMU8002N  
ACC. FRAME REC. SPAZIO  
UNIVERSAL - BLACK




ABX1741  
ACC. PANEL REC. SPAZIO  
PRINTING-RIGHT/LEFT 2-SIDED



ABX1841  
ACC. PANEL REC. SPAZIO  
PRINTING-UP 2-SIDED



ABX1941  
ACC. PANEL REC. SPAZIO  
PRINTING-DOWN 2-SIDED




AMU8003N  
ACC. FRAME REC. SPAZIO  
UNIVERSAL BIG HOLE - BLACK



ABX5441  
ACC. PANEL REC. SPAZIO  
PRINTING-LEFT SINGLE-SIDED



ABX5541  
ACC. PANEL REC. SPAZIO  
PRINTING-RIGHT SINGLE-SIDED




ABX5741  
ACC. PANEL REC. SPAZIO  
PRINTING-DOWN SINGLE-SIDED



ABX5841  
ACC. PANEL REC. SPAZIO  
PRINTING-UP SINGLE-SIDED

# SPAZIO R LSR318123N

## Spacing table

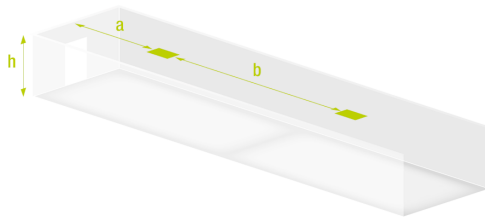

h	a	b
2 m	7,7 m	18,7 m
2.5 m	7,6 m	21,0 m
3 m	4,7 m	20,3 m
4 m	1,9 m	18,3 m
5 m	-	11,3 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

## Photometric guide

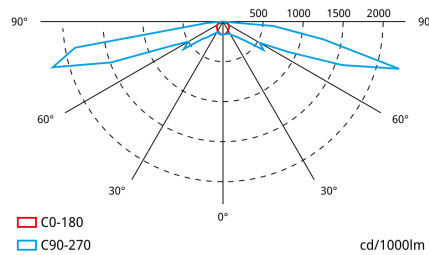

## Weight (kg)



Product weight:

0.16 kg

Boxed product weight:

0.22 kg

Weight of box of 18 units:

4.30 kg

## Dimensions (mm)

