

# SPAZIO R

## LSR320024

Taric 9405114090



8 436 00 3823957



### Technical Standards

EN-60598-1, EN-60598-2-22

### Certifications



### Functional Specifications



Central Battery System (CBS)



Supply: 24Vac/dc<0.31A



Maintained mode consumption: 7.4 W



Emergency: 200 lm  
Mains: 200 lm

### Mechanical and Aesthetic Specifications



Mounting: Ceiling Recessed



Insulation: Class II



IP42



IK04



Lamp: 1 x LED 3W



LED color temperature: 4000 K



Body material: Polycarbonate



Finish: White RAL9003




Diffuser / Optics: Polycarbonate Anti-panic Lens



Working temperature: -20 / 40 °C



Suitable for flammable surface: Yes



# SPAZIO R LSR320024

## Installation characteristics

Luminaire made up of a spotlight + electrical equipment with batteries

Installation type:

- Recessed ceiling.

Double spring clips installation method.



## Operating characteristics

Luminaire of the type: Centralized.

Valid to be supply in the following ways:

- Directly at rated voltage.
- By means of a centralized power supply unit at the nominal voltage (consult possible options).


## Accessories




ABX1741  
ACC. PANEL REC. SPAZIO  
PRINTING-RIGHT/LEFT 2-SIDED




ABX1841  
ACC. PANEL REC. SPAZIO  
PRINTING-UP 2-SIDED



AMU8002  
ACC. FRAME REC. SPAZIO  
UNIVERSAL - WHITE




ABX1941  
ACC. PANEL REC. SPAZIO  
PRINTING-DOWN 2-SIDED




AMU8003  
ACC. FRAME REC. SPAZIO  
UNIVERSAL BIG HOLE - WHITE



ABX5441  
ACC. PANEL REC. SPAZIO  
PRINTING-LEFT SINGLE-SIDED



ABX5541  
ACC. PANEL REC. SPAZIO  
PRINTING-RIGHT SINGLE-SIDED



ABX5741  
ACC. PANEL REC. SPAZIO  
PRINTING-DOWN SINGLE-SIDED



ABX5841  
ACC. PANEL REC. SPAZIO  
PRINTING-UP SINGLE-SIDED

# SPAZIO R LSR320024

## Spacing table



h	a	b	c	d
2 m	5,1 m	10,0 m	5,1 m	10,0 m
2.5 m	5,7 m	11,5 m	5,7 m	11,5 m
3 m	6,0 m	12,5 m	6,0 m	12,5 m
4 m	6,9 m	14,5 m	6,9 m	14,5 m
5 m	7,5 m	16,0 m	7,5 m	16,5 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 0.5 lux (anti-panic calculation).

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

## Photometric guide

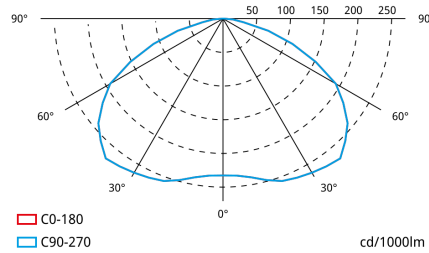

## Weight (kg)



Product weight:

0.16 kg

Boxed product weight:

0.22 kg

Weight of box of 12 units:

2.97 kg

## Dimensions (mm)

