



NEPTUNO

IP67 IK07 INOX



+25°C
-30°C

SPECIFICATION



Stainless steel body



Diffuser: Opal Polycarbonate

IP

IP67

IK

IK07

lm

350 lm - 950 lm



Duration: 1 h · Battery: LFP



Charging time: 12 h / 24 h (Cold)



Supply: 230 V - 50 Hz

LED

LED temperature: 4000 °K



Working temperature:
0 °C to +40 °C / -30 °C to +25 °C




AutoTest



AutoTest & WSS Lithium

DIMENSIONS (mm)



STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034

CERTIFICATIONS



RANGE

	Emergency	Mains	Type*	Dur.	Battery	Ref.
AutoTest	350 lm	210 lm	M/NM	1 h	3.2V 1.5A/h LFP	LNE9300LXP
	580 lm	350 lm	M/NM	1 h	6.4V 1.5A/h LFP	LNE9500LXP
	950 lm	400 lm	M/NM	1 h	6.4V 3.0A/h LFP	LNE9990LXP


NEPTUNO COLD**



	Emergency	Mains	Type*	Dur.	Battery	Ref.
AutoTest	350 lm	210 lm	M/NM	1 h	3.2V 1.5A/h LFP	LNC9300LXP

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

SPACING TABLE

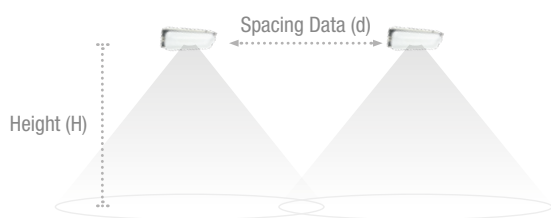


Spacing table calculated with 1 lux minimum illuminance

Height (H)	Spacing Data (d)		
	350 lm	580 lm	950 lm
2.5 m	10.7 m		
3 m	11.6 m		
4 m	12.9 m		
5 m	13.7 m		
6 m	14.3 m	17.4 m	20.6 m
8 m		18.6 m	22.5 m
10 m		19.4 m	23.6 m
12 m		19.3 m	24.6 m
14 m		17.7 m	24.9 m


ISOLUX CURVE

350 lm luminaire placed at 3m height

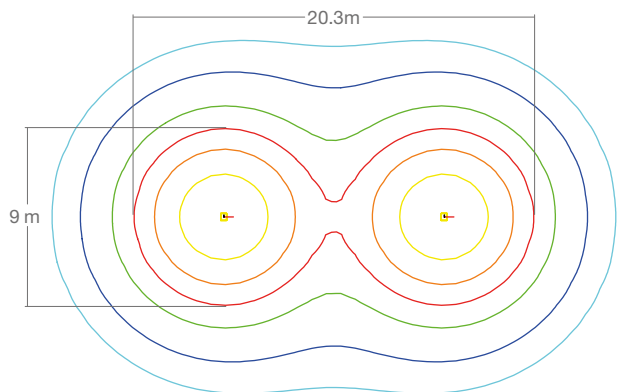

Isoline — 0.1 lx — 0.2 lx — 0.5 lx — 1.0 lx — 2.0 lx — 5.0 lx


PHOTOMETRIC GUIDE

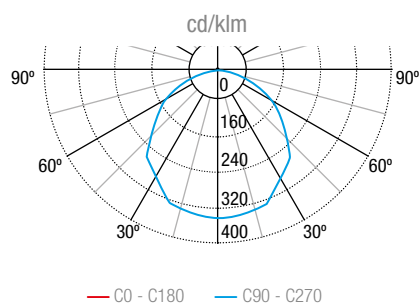

ACCESSORIES



AGA230
Protection
grille

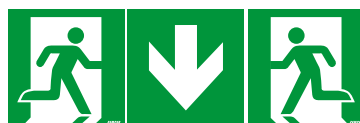

APT316
Modular self-adhesive
signalling pictogram
set with 4 arrows