



 **IP 65**

Ingress Protection

1 2 3 4 5 6

Protection from Solids (dust, dirt...)

1 2 3 4 5 6 7 8 9

Protection from Liquids (water...)

Totally dust tight. Full protection against dust and other particles, including a vacuum seal, tested against continuous airflow. Protected against water jets of water from all directions, limited ingress permitted.

 **IK 10**

Impact Rating

Impact Protection

00 01 02 03 04 05 06 07 08 09 10

Protected against 20 joules of impact (the equivalent to the impact of a 5kg mass dropped from 400mm above the impacted surface)

# SPAZIO HIGH BAY

## SPECIFICATION



Polycarbonate body



Diffuser: Transparent Polycarbonate

IP

IP65

IK

IK10

lm

680 lm



Duration: 1 h · Battery: LFP



Charging time: 24 h.



Supply: 230 V - 50 Hz

LED

LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C




AutoTest

WARRANTY

**5**  
YEAR

AutoTest & WSS Lithium

## DIMENSIONS (mm)

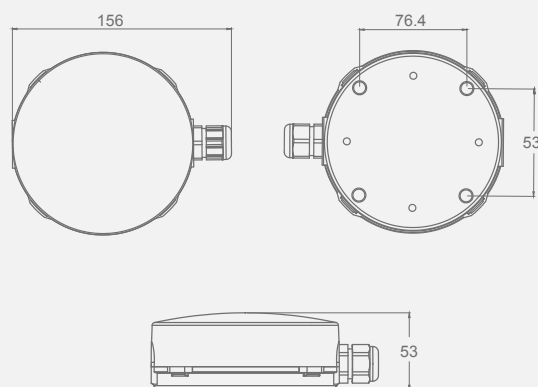

## STANDARDS COMPLIANCE

EN-60598-2-22  
AutoTest: EN-62034

## CERTIFICATIONS




## RANGE

	Emergency	Type*	Dur.	Battery	Ref.
AutoTest	680 lm	NM	1 h	6.4V 1.5A/h LFP	LUE4700LX

\*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.  
For version in black colour, add an 'N' at the end of the reference.


## SPACING TABLE

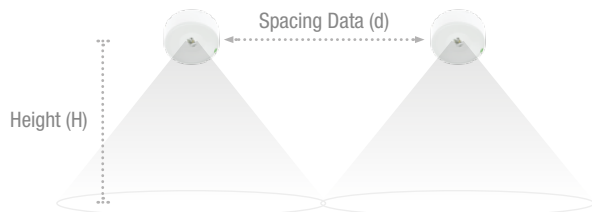

Spacing table calculated with 1 lux minimum illuminance

Height (H)	Spacing Data (d)
	<b>680 lm</b>
6 m	18.2 m
8 m	19.9 m
10 m	21.0 m
12 m	21.4 m
14 m	21.1 m

## ISOLUX CURVE

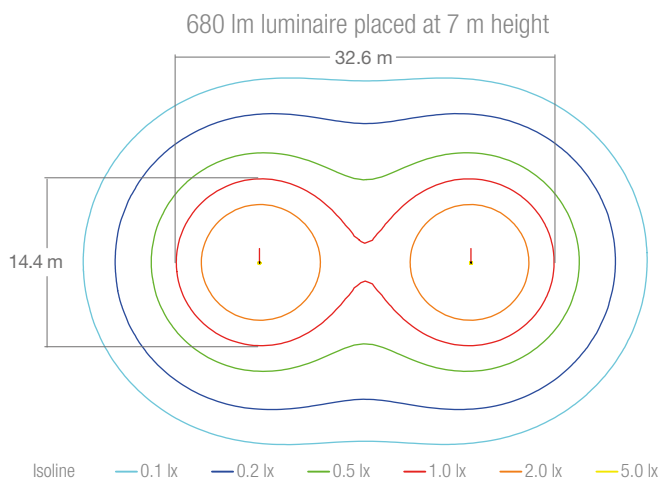

## PHOTOMETRIC GUIDE

