



Surface

 It allows lateral cable entry.

ALYA MAXI


Design by
Ángel Díaz Cambrero

SPECIFICATION

-  Polycarbonate body
-  Optics: Circular Lens + Hall Lens
-  IP42
-  IK04
-  100 lm - 390 lm
-  Duration: 1 - 3 - 8 h · Battery: Ni-CD / LiFePO₄
-  Charging time: 12/24 h according to part number
-  Supply: 230 V - 50 Hz
-  LED temperature: 4000 °K
-  Working temperature: 0 °C to +40 °C
-  AutoTest
-  SmartZ®
-  Lateral cable entry



DIMENSIONS (mm)

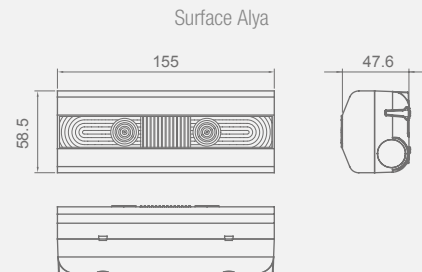


STANDARDS COMPLIANCE

EN-60598-2-22
 AutoTest: EN-62034
 DALI-2: EN 62386
 Wireless SmartZ®: ETSI EN 303 447-1

CERTIFICATIONS




RANGE

	Emergency	Type*	Dur.	Battery	Part number
AutoTest	390 lm	NM	1 h	3.2V 1.5A/h LiFePO ₄	LYA5400LX
	390 lm	M/NM	1 h	3.2V 1.5A/h LiFePO ₄	LYA5400LXP
	600 lm	NM	1 h	6.4V 1.5A/h LiFePO ₄	LYA5600LX
	170 lm	NM	3 h	3.2V 1.5A/h LiFePO ₄	LYA5200LX3
	300 lm	M/NM	3 h	3.2V 3.0A/h LiFePO ₄	LYA5300LXP3
	390 lm	M/NM	1 h	3.2V 1.5A/h LiFePO ₄	LYA5400LAP
	170 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LYA5200LAP3
	300 lm	M/NM	3 h	3.2V 3.0A/h LiFePO ₄	LYA5300LAP3
Wireless SmartZ®	390 lm	NM	1 h	3.2V 1.5A/h LiFePO ₄	LYA5400LW
	170 lm	NM	3 h	3.2V 1.5A/h LiFePO ₄	LYA5200LW3
	300 lm	NM	3 h	3.2V 3.0A/h LiFePO ₄	LYA5300LW3
	100 lm	NM	8 h	3.2V 3.0A/h LiFePO ₄	LYA5100LW8

*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.
 *M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.
 For black version, add "N" at the end of the part number. Luminous flux decreases by 18% in black colour version.
 The recessed frame should be ordered as accessory with part number AMY0011N (black) or AMY0011 (white)

SPACING TABLE

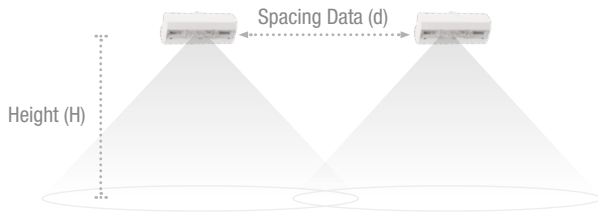


Spacing table calculated with 1 lux minimum illuminance


Height (H)	Spacing Data (d)	
	300 lm	390 lm
2.5 m	14.8 m	14.8 m
3 m	16.5 m	17.8 m
4 m	16.4 m	19.1 m
5 m	16.1 m	18.7 m
6 m	14.0 m	17.9 m

ISOLUX CURVE

390 lm luminaire placed at 3 m height

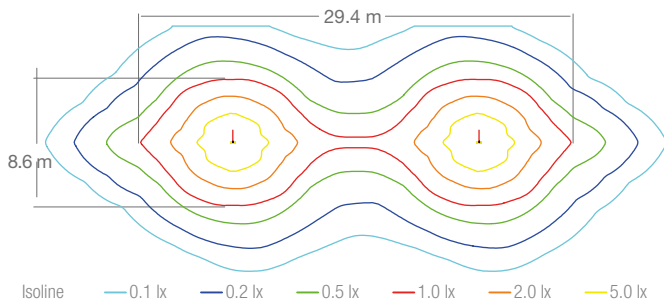

PHOTOMETRIC GUIDE

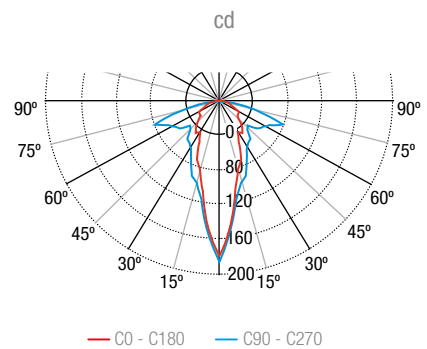

ACCESSORIES



AMY0011
White ceiling recessed accessory



AMY0011N
Black ceiling recessed accessory