



# OUTLIGHT

IP65 IK10

## SPECIFICATION



Die-casting aluminum



Diffuser: Polycarbonate

IP

IP65

IK

IK10

lm

300 lm



Duration: 1 h · Battery: LiFePO<sub>4</sub>



Charging time: 24 h



Supply: 220 - 240 V - 50 / 60 Hz

LED

LED temperature: 3000 °K / 4000 °K



Working temperature:  
0 °C to +40 °C





AutoTest

AutoTest, SmartZ<sup>®</sup>  
& DALI-2 Lithium

**WARRANTY**  
**5**  
**YEAR**

## DIMENSIONS (mm)

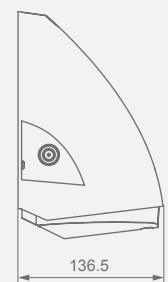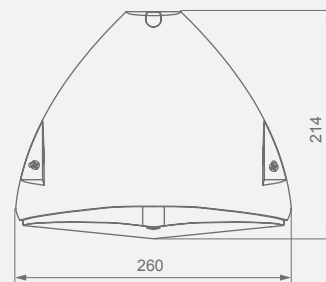

## STANDARDS COMPLIANCE

EN-60598-2-22  
EN-60598-1

## CERTIFICATIONS

CE

RANGE

Emergency	Type*	Dur.	Battery	Part number
AutoTest	300 lm	M/NM	1 h   3.2V 1.5Ah LiFePO <sub>4</sub>	LOE3300LXP

\*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

SPACING TABLE


Spacing table calculated with 1 lux minimum illuminance



Height (H)	Spacing Data (d)
	<b>300 lm</b>
2.5 m	10.36 m
3 m	11.15 m
4 m	12.39 m
5 m	13.25 m
6 m	13.76 m

ISOLUX CURVE

300 lm luminaire placed at 3m height

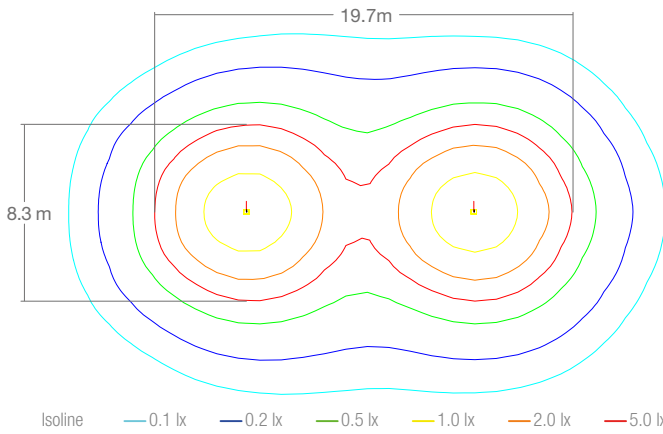

PHOTOMETRIC GUIDE

