



 It allows lateral cable entry.

EXITALYA MAXI Surface

(Surface Ceiling Mounted & Surface Wall Mounted)

SPECIFICATION



Polycarbonate body



IP42



IK04



Duration: 1 - 3 - 8 h · Battery: LiFePO₄



Charging time: 12 h



Supply: 230 V - 50 Hz



LED temperature: 6000 °K



Working temperature: 0 °C to +40 °C



AutoTest



SmartZ®



Lateral cable entry



STANDARDS COMPLIANCE

EN-60598-2-22

Pictographs: EN ISO7010

AutoTest: EN-62034

DALI-2: EN 62386

Wireless SmartZ®: ETSI EN 303 447-1

AutoTest, SmartZ®
& DALI-2 Lithium


WARRANTY

5
YEAR

EVCI0
WARRANTY

10
YEAR

DIMENSIONS (mm)

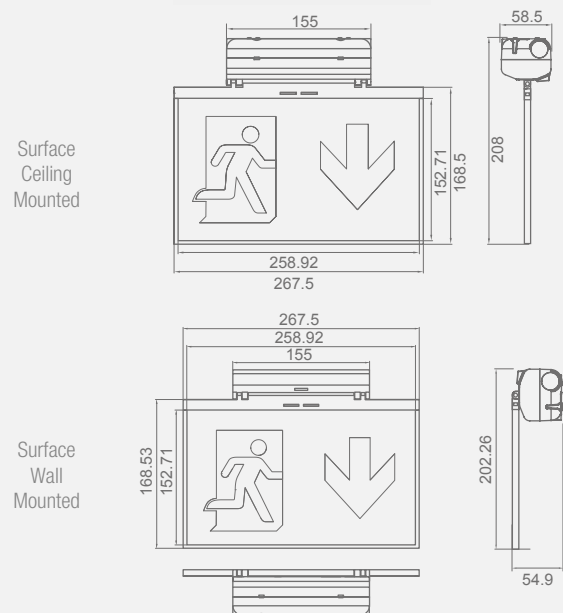

VIEWING DISTANCE




CERTIFICATIONS





RANGE

	Type*	Dur.	Battery	Part number
AutoTest	M	1 h	3.2V 1.0A/h LiFePO ₄	LYE5070LXP
	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE5070LXP3
	M	1 h	3.2V 1.0A/h LiFePO ₄	LYE5070LAP
	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE5070LAP3
Wireless SmartZ [®]	M	1 h	3.2V 1.0A/h LiFePO ₄	LYE5070LWP
	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE5070LWP3
	M	8 h	3.2V 3.0A/h LiFePO ₄	LYE5070LWP8

*M: Maintained.

For version in black colour, add an 'N' at the end of the part number.



Wall mounted



Ceiling mounted

180° adaptable

Its specific design makes it an exign sign adaptable to any position on the surface where it is installed: ceiling, wall or sloping ceiling.

The banner is made of a very innovative self-diffusing material that provides a perfect and uniform diffusion of light.



It is supplied with a complete set of pictograms



1 unit



1 unit



2 units



1 unit (white)