



IP42 IK04 Lm 120 LED 4000°K 1h. 25,8m. LiFePO<sub>4</sub> 850°

### DISTANCIA DE VISIÓN

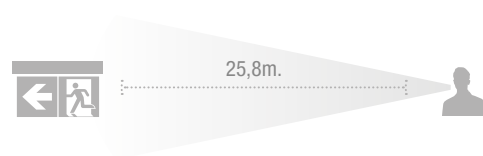


### DIMENSIONES

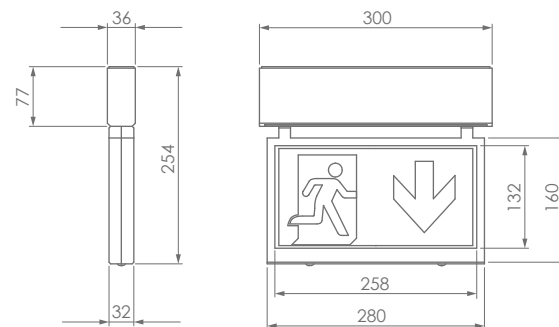


### INTERDISTANCIAS

Posición	Altura (m)			
	2,5	3,0	3,5	4,0
↔↔	3,11	3,22	3,21	3,09
↔↔	7,69	8,30	8,77	9,05
↔↔	7,36	8,01	8,54	8,82
↔↔	7,06	7,77	8,34	8,59
↔↔	2,96	3,06	3,08	2,96

Interdistancias calculadas con 120 lm y E<sub>min</sub> = 1 lx

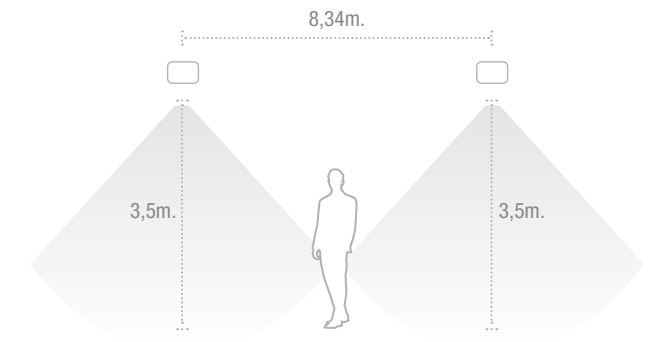

### CURVAS FOTOMÉTRICAS

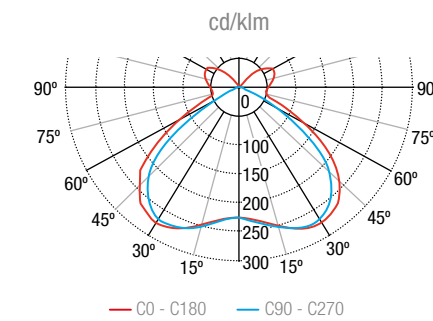

### REFERENCIAS

lm	Dist. Visión	Tipo*	Aut. (h)	Batería	Autotest	PVR (€)
-	25,8m.	P	1	3,2V 1,0A/h LFP	LHS3070LXP	132,67
120	25,8m.	P	1	3,2V 1,5A/h LFP	LHS3120LXP	246,38

\*P: funcionamiento permanente.



Se suministra con un juego completo de pictogramas

