





- IP65
- IK07
- 1-3h.
- LED 4000°K
- Lm 1500 3300
- LiFePO₄
- 30°
-
-
-
-

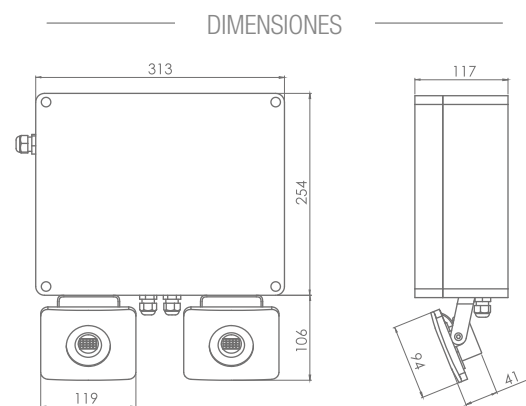

INTERDISTANCIAS

Posición	Altura (m)			
	6	8	10	12
	23.89	27.47	29.81	31.47
	10.00	10.99	11.57	11.78

Interdistancias calculadas con 1.500 lm y E_{min} = 1 lx

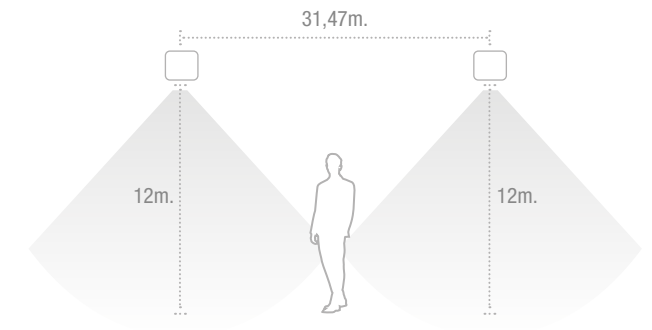

REFERENCIAS

lm	Tipo*	Aut. (h)	Batería	Estándar	PVR (€)	Autotest	PVR (€)	Wireless	PVR (€)
1500	NP	1	12,8V 3A/h LFP	PME1500LC	398,83	PME1500LX	465,51	PME1500LDW	550,78
3250	NP	1	2 x 12,8V 3A/h LFP	PME3000LC	479,64				
3300	NP	1	2 x 12,8V 3A/h LFP			PME3000LX	559,27	PME3000LDW	647,87
2500	NP	2	2 x 12,8V 3A/h LFP			PME2500LX2	562,25		
1500	NP	3	2 x 12,8V 3A/h LFP	PME1500LC3	483,94	PME1500LX3	499,57	PME1500LD3W	586,05

BAJAS TEMPERATURAS

lm	Tipo*	Aut. (h)	Batería	Autotest	PVR (€)	Wireless	PVR (€)
3300	NP	1	2 x 12,8V 3A/h LFP	PME3000LXF	638,92	PME3000LDWF	730,36

*NP: funciona solo en caso de ausencia de red.



CURVAS FOTOMÉTRICAS

