




- IP42
- IK04
- 1h.
- LED 4000°K
- Lm 1500 3300
- LiFePO<sub>4</sub>
- 
- 
- 
- 


DIMENSIONES

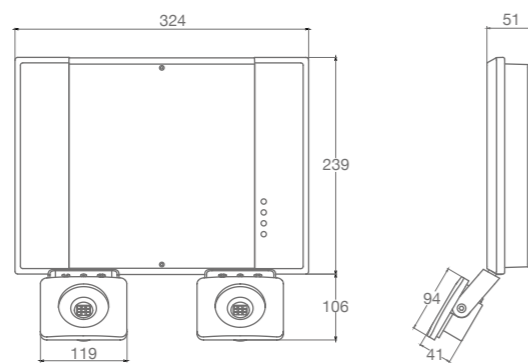

INTERDISTANCIAS

Posición	Altura (m)			
	6	8	10	12
	23.89	27.47	29.81	31.47
	10.00	10.99	11.57	11.78

Interdistancias calculadas con 1.500 lm y E<sub>min</sub> = 1 lx

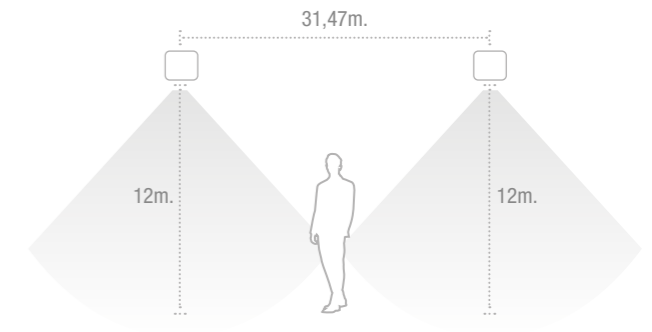

REFERENCIAS

lm	Tipo*	Aut. (h)	Baterías (Uds./A/h)	Estándar	PVR (€)	Autotest	PVR (€)	Wireless	PVR (€)
1500	NP	1	12,8V 3A/h LFP	PFL1500LC	320,60	PFL1500LX	352,75	PFL1500LDW	420,26
3300	NP	1	2 x 12,8V 3A/h LFP	PFL3000LC	404,22	PFL3000LX	428,32	PFL3000LDW	460,26

\*NP: funciona solo en caso de ausencia de red.



CURVAS FOTOMÉTRICAS

