



ARIAN

SPECIFICATION

Wall	Surface	✓
	Recessed	x
Ceiling	Surface	✓
	Recessed	x

Polycarbonate body

Diffuser: Opal Polycarbonate

IP65

IK10

150 lm - 600 lm

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz


LED temperature: 4000 °K

Working temperature:
0 °C to +40 °C

AutoTest



DIMENSIONS (mm)



STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
DALI: EN 62386

CERTIFICATIONS



RANGE

	Emergency	Mains	Type*	Dur.	Battery	Part Number
AutoTest	150 lm		NM	3 h	3.2V 1.5A/h LiFePO ₄	LAE9150LX3
	150 lm	90 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LAE9150LXP3
	300 lm	180 lm	M/NM	3 h	3.2V 3.0A/h LiFePO ₄	LAE9250LXP3
DALI	150 lm	90 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LAE9150LAP3
	600 lm	360 lm	M/NM	3 h	6.4V 1.5A/h LiFePO ₄	LAE9600LAP3

*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.


*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

SPACING TABLE

LAE9150LX3 = 150 lm

Mounting Height	0.5 lux				1 lux			
	↔ ↔	↔ ↔	↔ ↔	↔ ↔	↔ ↔	↔ ↔	↔ ↔	↔ ↔
2.0 m	3.77 m	9.24 m	9.24 m	3.77 m	3.06 m	7.61 m	7.61 m	3.06 m
2.5 m	4.11 m	10.18 m	10.18 m	4.11 m	3.27 m	8.29 m	8.29 m	3.27 m
3 m	4.38 m	10.98 m	10.98 m	4.38 m	3.40 m	8.82 m	8.82 m	3.40 m
3.5 m	4.58 m	11.64 m	11.64 m	4.58 m	3.44 m	9.22 m	9.22 m	3.44 m
4 m	4.73 m	12.20 m	12.20 m	4.73 m	3.43 m	9.52 m	9.52 m	3.43 m
4.5 m	4.81 m	12.66 m	12.66 m	4.81 m	3.34 m	9.68 m	9.68 m	3.34 m


PHOTOMETRIC GUIDE

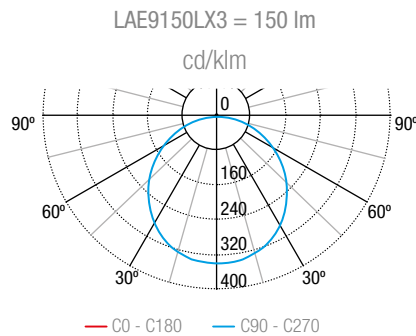

ACCESSORIES



AGA230
Protection grille

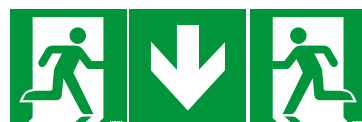

APT316
Modular self-adhesive pictogram set
with 4 arrows



ADBA008
Diffuser + exit sign kit for Arian weatherproof
Set of pictographs (not included)



APV616 APV617 APV618 APV619