



EXITALYA Surface

SPECIFICATION

Wall	Surface	✓
	Recessed	x
Ceiling	Surface	✓
	Recessed	x

Cable entry from rear of the luminaire

Polycarbonate body

IP42

IK04

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz

LED temperature: 4000 °K

Working temperature: 0 °C to +40 °C

AutoTest



STANDARDS COMPLIANCE

EN-60598-2-22


Pictographs: EN ISO7010

AutoTest: EN-62034

Dali: EN 62386



DIMENSIONS (mm)

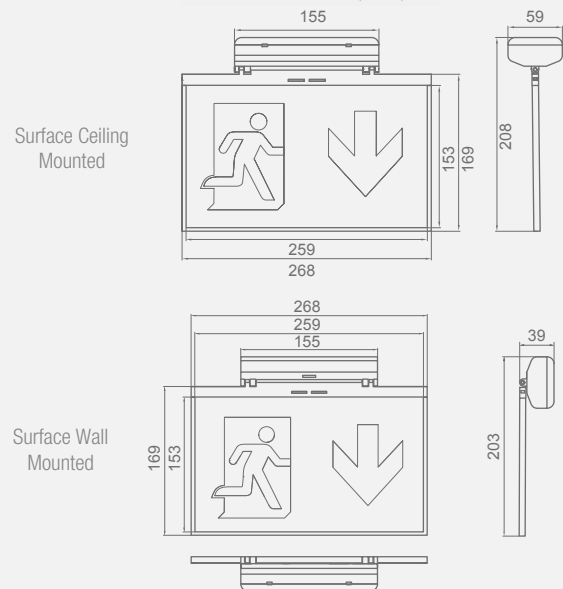

VIEWING DISTANCE



CERTIFICATIONS



IP

IK



LED





RANGE

	Type*	Dur.	Battery	Part Number
AutoTest	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE3070LXP3
DALI	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE3070LAP3

*M: Maintained.



Wall mounted



Ceiling mounted

180° adaptable

Its specific design makes it an exit sign adaptable to any position on the surface where it is installed: ceiling, wall or sloping ceiling.

The banner is made of a very innovative self-diffusing material that provides a perfect and uniform diffusion of light.



It is supplied with a complete set of pictograms



1 unit x EEP407



1 unit x EEP408



2 units x EEP409



1 unit x EEP406 (white)