



KONS

SPECIFICATION

Wall	Surface	✓
	Recessed	x
Ceiling	Surface	✓
	Recessed	x



Polycarbonate body

IP

IP42

IK

IK04



Duration: 3 h · Battery: LiFePO₄



Charging time: 12 h



Supply: 230 V - 50 Hz

LED

LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C




AutoTest



WARRANTY

6
YEAR

DIMENSIONS (mm)

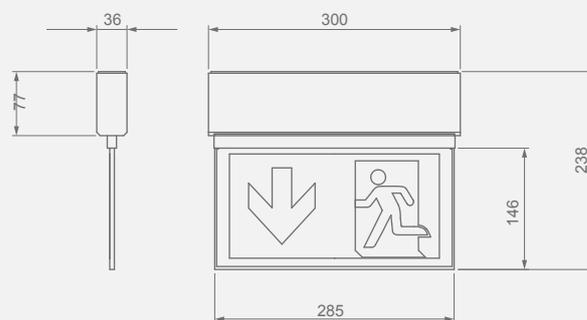

VIEWING DISTANCE



STANDARDS COMPLIANCE

EN-60598-2-22
Pictographs: EN ISO7010
AutoTest: EN-62034
Dali: EN 62386

CERTIFICATIONS



UK
CA

RANGE

	Type*	Dur.	Battery	Part Number
AutoTest	M	3 h	3.2V 1.5A/h LiFePO ₄	LKS3070LXP3
	M	3 h	3.2V 1.5A/h LiFePO ₄	LKW3070LXP3**
DALI	M	3 h	3.2V 1.5A/h LiFePO ₄	LKS9070LAP3
	M	3 h	3.2V 1.5A/h LiFePO ₄	LKW9070LAP3**

*M: Maintained.

**Wire suspended version

ACCESSORIES

It is supplied with a complete set of pictograms



1 unit x EEP032



2 units x EEP030



1 unit x EEP033

