



Real size



SPAZIO MINI

Patent Pending

SPECIFICATION

Wall	Surface	x
	Recessed	x
Ceiling	Surface	x
	Recessed	✓

Polyamide body

Escape route lens - D
Anti-panic lens - R

IP42

IK04

165 lm

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz

LED temperature: 4000 °K

Working temperature: 0 °C to +40 °C

AutoTest



STANDARDS COMPLIANCE

EN-60598-2-22


AutoTest: EN-62034

DALI: EN 62386

CERTIFICATIONS



DIMENSIONS (mm)

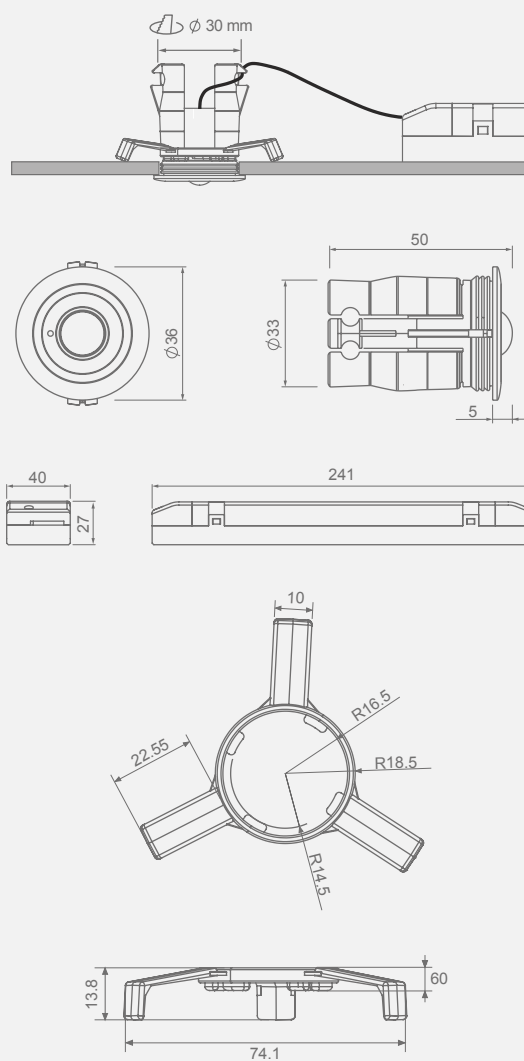

Fixing system that allows mounting on any thickness of suspended ceiling, including metal ceilings with a thickness less than 6 mm.

RANGE							
	Emergency	Mains	Type*	Lens**	Dur.	Battery	Part Number
AutoTest	165 lm	100 lm	M/NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LMR9170LXP3
	165 lm	100 lm	M/NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LMR9171LXP3
DALI	165 lm	100 lm	NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LMR9170LA3
	165 lm	100 lm	NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LMR9171LA3
	165 lm	100 lm	M/NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LMR9170LAP3
	165 lm	100 lm	M/NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LMR9171LAP3

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

**R: Round Lens (Anti-panic) / D: Corridor Lens (Escape route)

For version in black colour, add an 'N' at the end of the part number.

SPACING TABLE

ESCAPE ROUTE LENS

LMR9171LAP3 = 165 lm

Mounting Height	0.5 lux				1 lux			
	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿
2.0 m	2.97 m	7.30 m	18.95 m	8.42 m	2.22 m	5.91 m	17.48 m	7.74 m
2.5 m	3.10 m	8.02 m	22.14 m	9.76 m	2.28 m	6.19 m	20.17 m	8.58 m
3 m	3.16 m	8.51 m	25.01 m	10.81 m	2.33 m	6.37 m	22.57 m	9.14 m
3.5 m	3.22 m	8.75 m	27.64 m	11.46 m	2.33 m	6.51 m	23.91 m	9.63 m
4 m	3.27 m	8.94 m	30.06 m	12.04 m	2.22 m	6.59 m	25.00 m	8.30 m
4.5 m	3.32 m	9.07 m	31.52 m	12.56 m	2.09 m	6.61 m	25.99 m	7.87 m

ANTI-PANIC LENS

LMR9170LAP3 = 165 lm


Mounting Height	0.5 lux				1 lux			
	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿	⦿ ↔ ⦿
2.0 m	4.19 m	10.08 m	10.08 m	4.19 m	3.45 m	8.44 m	8.44 m	3.45 m
2.5 m	4.62 m	11.23 m	11.23 m	4.62 m	3.68 m	9.30 m	9.30 m	3.68 m
3.0 m	4.95 m	12.21 m	12.21 m	4.95 m	3.82 m	9.95 m	9.95 m	3.82 m
3.5 m	5.16 m	13.06 m	13.06 m	5.16 m	3.88 m	10.38 m	10.38 m	3.88 m
4.0 m	5.32 m	13.79 m	13.79 m	5.32 m	3.85 m	10.70 m	10.70 m	3.85 m
4.5 m	5.43 m	14.28 m	14.28 m	5.43 m	3.74 m	10.92 m	10.92 m	3.74 m

SPAZIO MINI


ZEMPER

PHOTOMETRIC GUIDE


ESCAPE ROUTE LENS

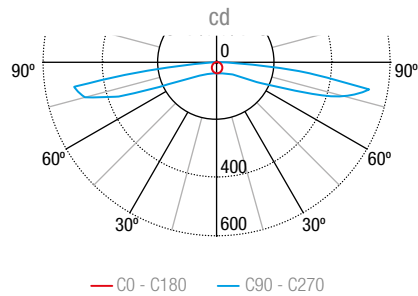

ANTI-PANIC LENS

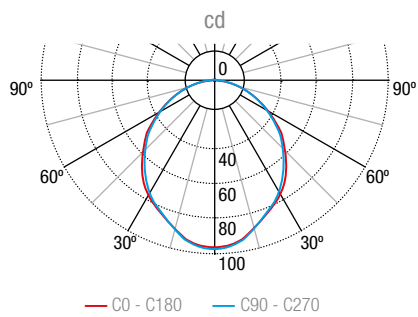

DIMENSIONS

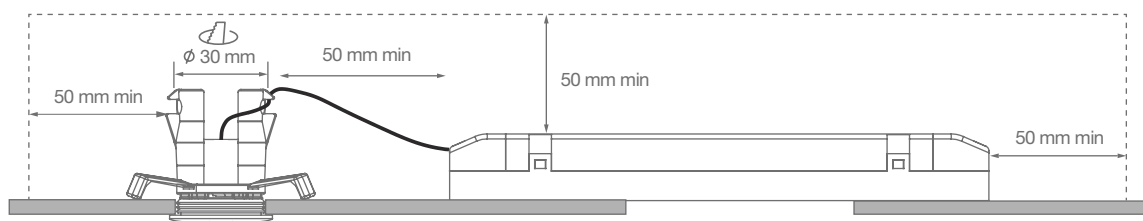

The installation aperture for the product head is 30 mm.
Please note, the control and battery casing is 40 mm wide and will require another access point or aperture to install above the ceiling.

Emergency luminaire for suspended ceilings

