



Real size



SPAZIO R

SPECIFICATION

Wall	Surface	x
	Recessed	x
Ceiling	Surface	x
	Recessed	✓

Polycarbonate body

Escape route lens - D
Anti-panic lens - R

IP IP42

IK IK04

lm 165 lm

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz

LED temperature: 4000 °K


Working temperature: 0 °C to +40 °C

AutoTest



DIMENSIONS (mm)

Spazio LSR

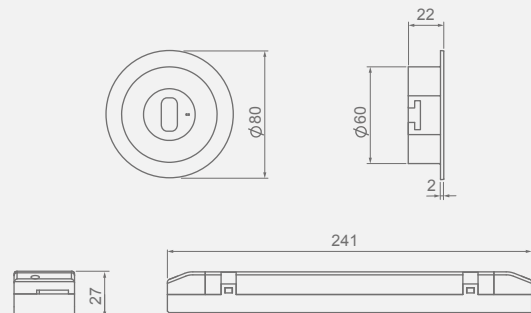

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
DALI: EN 62386

CERTIFICATIONS





Real size



SPAZIO Q

SPECIFICATION

Wall	Surface	x
	Recessed	x
Ceiling	Surface	x
	Recessed	✓

Polycarbonate body

Escape route lens - D
Anti-panic lens - R

IP42

IK04

165 lm

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz

LED temperature: 4000 °K


Working temperature: 0 °C to +40 °C

AutoTest



DIMENSIONS (mm)

Spazio LSQ

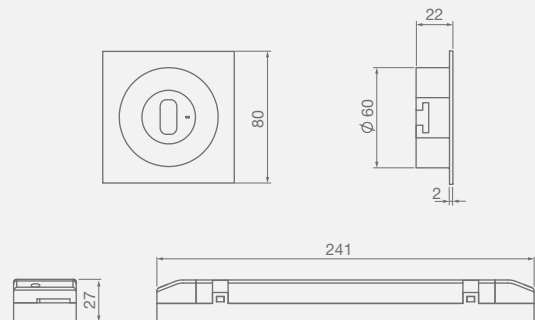

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
DALI: EN 62386

CERTIFICATIONS



SPAZIO Q/R

ZEMPER

RANGE



SPAZIO R - Round

	Emergency	Mains	Type*	Lens**	Dur.	Battery	Part Number
AutoTest	165 lm		NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSR3170LX3
	165 lm		NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSR3171LX3
	165 lm	100 lm	M/NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSR3170LXP3
	165 lm	100 lm	M/NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSR3171LXP3
DALI	165 lm	100 lm	NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSR9170LA3
	165 lm	100 lm	NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSR9171LA3
	165 lm	100 lm	M/NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSR9170LAP3
	165 lm	100 lm	M/NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSR9171LAP3



SPAZIO Q - Square

	Emergency	Mains	Type*	Lens**	Dur.	Battery	Part Number
AutoTest	165 lm		NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSQ3170LX3
	165 lm		NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSQ3171LX3
	165 lm	100 lm	M/NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSQ3170LXP3
	165 lm	100 lm	M/NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSQ3171LXP3
DALI	165 lm	100 lm	NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSQ9170LA3
	165 lm	100 lm	NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSQ9171LA3
	165 lm	100 lm	M/NM	R	3 h	3.2V 1.8A/h LiFePO ₄	LSQ9170LAP3
	165 lm	100 lm	M/NM	D	3 h	3.2V 1.8A/h LiFePO ₄	LSQ9171LAP3

*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

**R: Round Lens (Anti-panic)

**D: Corridor Lens (Escape route)

For version in black colour, add an 'N' at the end of the part number.

SPACING TABLES

ESCAPE ROUTE LENS

LSQ3171LX3 = 165 lm

Mounting Height	0.5 lux				1 lux			
	↔↔○	○↔↔	○↔↔	○↔↔	↔↔○	○↔↔	○↔↔	○↔↔
2.0 m	2.97 m	7.30 m	18.95 m	8.42 m	2.22 m	5.91 m	17.48 m	7.74 m
2.5 m	3.10 m	8.02 m	22.14 m	9.76 m	2.28 m	6.19 m	20.17 m	8.58 m
3 m	3.16 m	8.51 m	25.01 m	10.81 m	2.33 m	6.37 m	22.57 m	9.14 m
3.5 m	3.22 m	8.75 m	27.64 m	11.46 m	2.33 m	6.51 m	23.91 m	9.63 m
4 m	3.27 m	8.94 m	30.06 m	12.04 m	2.22 m	6.59 m	25.00 m	8.30 m
4.5 m	3.32 m	9.07 m	31.52 m	12.56 m	2.09 m	6.61 m	25.99 m	7.87 m

ANTI-PANIC LENS


LSQ3170LX3 = 165 lm

Mounting Height	0.5 lux				1 lux			
	↔↔○	○↔↔	○↔↔	○↔↔	↔↔○	○↔↔	○↔↔	○↔↔
2.0 m	4.19 m	10.08 m	10.08 m	4.19 m	3.45 m	8.44 m	8.44 m	3.45 m
2.5 m	4.62 m	11.23 m	11.23 m	4.62 m	3.68 m	9.30 m	9.30 m	3.68 m
3.0 m	4.95 m	12.21 m	12.21 m	4.95 m	3.82 m	9.95 m	9.95 m	3.82 m
3.5 m	5.16 m	13.06 m	13.06 m	5.16 m	3.88 m	10.38 m	10.38 m	3.88 m
4.0 m	5.32 m	13.79 m	13.79 m	5.32 m	3.85 m	10.70 m	10.70 m	3.85 m
4.5 m	5.43 m	14.28 m	14.28 m	5.43 m	3.74 m	10.92 m	10.92 m	3.74 m

PHOTOMETRIC GUIDES


ESCAPE ROUTE LENS

LSR3171LX3 = 165 lm

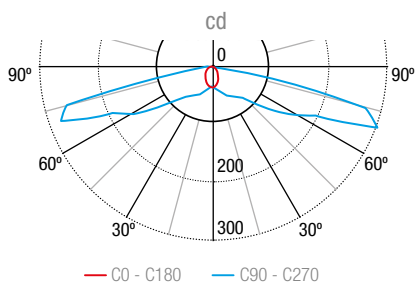

ANTI-PANIC LENS

LSR3170LX3 = 165 lm

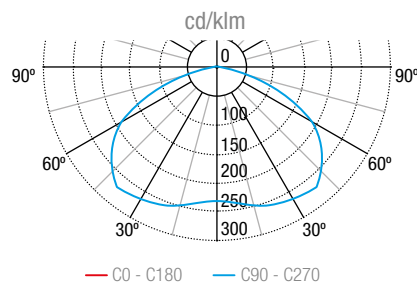

ACCESSORIES



Screen printed (Spazio Q/R)



ABX1741



ABX1741



ABX1841



ABX1941



AMU8002
Universal frame
(from 6W to Spazio Q/R)