



Escape route lens



Anti-panic lens



Asymmetrical wall lens

SPAZIO T·LED.

SPECIFICATION

Wall	Surface	✓
	Recessed	✓
Ceiling	Surface	✓
	Recessed	✓

Cable entry from rear of the luminaire

Polycarbonate body

Escape route lens - D

Anti-panic lens - R

Asymmetrical wall lens - W

IP40

IK04

280 lm

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz


LED temperature: 4000 °K

Working temperature: 0 °C to +40 °C

AutoTest



DIMENSIONS (mm)

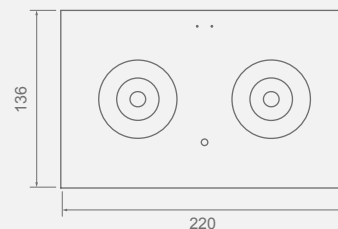

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034

CERTIFICATIONS



IP

IK

lm



LED



RANGE

	Emergency	Mains	Type*	Lens**	Dur.	Battery	Part Number
AutoTest	280 lm	170 lm	M/NM	R	3 h	3.2V 3.0A/h LiFePO ₄	LST3300LXP3
	280 lm	170 lm	M/NM	D	3 h	3.2V 3.0A/h LiFePO ₄	LST3301LXP3
	280 lm	170 lm	M/NM	W	3 h	3.2V 3.0A/h LiFePO ₄	LST3302LXP3

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

**R: Round Lens (Anti-panic) / D: Corridor Lens (Escape route) / W: Asimetric - Wall Mounted

For version in black colour, add an 'N' at the end of the part number.

ACCESSORIES



Screen printed legend



ABT1781



ABT1781



ABT1881



ABT1981



Screen printed legend



ABX1761



ABX1761



ABX1861



ABX1961



AMT0061
White ceiling
recessed accessory



SPAZIO T·LED·

ZEMPER

SPACING TABLE

ESCAPE ROUTE LENS

LST3301LXP3 = 280 lm

Mounting Height	0.5 lux				1 lux			
2.0 m	3.04 m	6.63 m	19.17 m	8.70 m	2.65 m	6.08 m	18.06 m	8.11 m
2.5 m	3.52 m	7.87 m	22.80 m	10.22 m	2.91 m	7.04 m	21.18 m	9.40 m
3 m	3.86 m	8.96 m	26.10 m	11.59 m	2.94 m	7.70 m	23.99 m	10.50 m
3.5 m	4.08 m	9.91 m	29.15 m	12.83 m	2.97 m	8.16 m	26.55 m	11.49 m
4 m	4.14 m	10.59 m	31.98 m	13.94 m	2.97 m	8.28 m	28.81 m	12.40 m
4.5 m	4.18 m	11.18 m	34.62 m	14.97 m	2.92 m	8.33 m	30.84 m	13.24 m

ANTI-PANIC LENS

LST3300LXP3 = 280 lm

Mounting Height	0.5 lux				1 lux			
2.0 m	4.10 m	9.37 m	9.50 m	4.16 m	3.63 m	8.26 m	8.36 m	3.71 m
2.5 m	4.74 m	10.70 m	10.89 m	4.84 m	4.13 m	9.54 m	9.71 m	4.23 m
3.0 m	5.30 m	12.11 m	12.30 m	5.43 m	4.56 m	10.64 m	10.88 m	4.69 m
3.5 m	5.79 m	13.37 m	13.63 m	5.95 m	4.91 m	11.63 m	11.92 m	5.08 m
4.0 m	6.24 m	14.51 m	14.83 m	6.42 m	5.14 m	12.52 m	12.86 m	5.36 m
4.5 m	6.63 m	15.54 m	15.93 m	6.84 m	5.31 m	13.31 m	13.70 m	5.56 m

ASYMMETRICAL WALL LENS

LST3302LXP3 = 280 lm

Mounting Height	0.5 lux				1 lux			
2.0 m	3.20 m	10.61 m	8.27 m	3.63 m	2.54 m	8.92 m	7.19 m	3.17 m
2.5 m	3.44 m	11.88 m	9.48 m	4.16 m	2.70 m	9.89 m	8.26 m	3.61 m
3.0 m	3.66 m	12.95 m	10.52 m	4.65 m	2.70 m	10.79 m	9.24 m	3.94 m
3.5 m	3.81 m	13.93 m	11.61 m	5.08 m	2.36 m	11.56 m	10.09 m	4.20 m
4.0 m	3.85 m	14.85 m	12.62 m	5.43 m	1.92 m	12.20 m	10.82 m	4.23 m
4.5 m	3.64 m	15.68 m	13.53 m	5.72 m	1.63 m	12.43 m	11.44 m	4.11 m


SPAZIO T·LED·

ZEMPER

PHOTOMETRIC GUIDE

ESCAPE ROUTE LENS


LST3301LXP3 = 280 lm

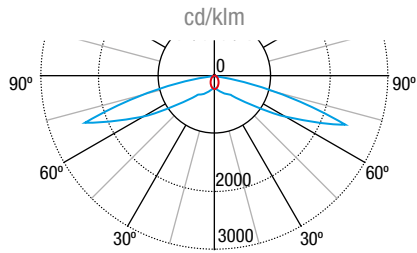

— C0 - C180 — C90 - C270

ANTI-PANIC LENS


LST3300LXP3 = 280 lm

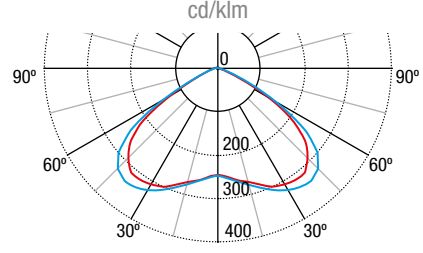

— C0 - C180 — C90 - C270

ASYMMETRICAL WALL LENS

LST3302LXP3 = 280 lm

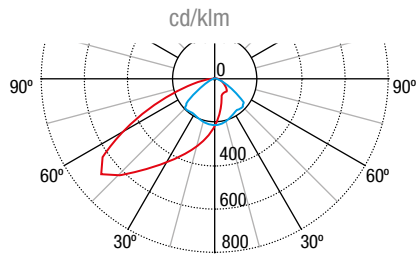

— C0 - C180 — C90 - C270

