



T·LED·

SPECIFICATION

Wall	Surface	✓
	Recessed	✓
Ceiling	Surface	✓
	Recessed	✓

Cable entry from rear of the luminaire

Polycarbonate body

Diffuser: Transparent Polycarbonate

IP42

IK04

250 lm

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz


LED temperature: 4000 °K

Working temperature: 0 °C to +40 °C

AutoTest

WARRANTY
6
YEAR

DIMENSIONS (mm)

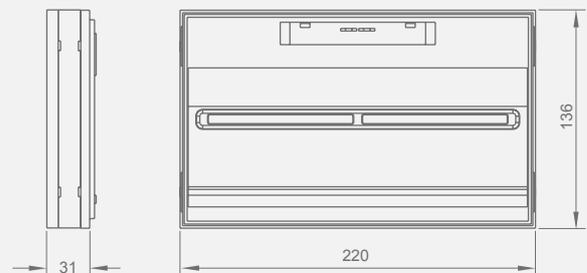

STANDARDS COMPLIANCE

EN-60598-2-22

AutoTest: EN-62034

Wireless: ETSI EN 300 220

CERTIFICATIONS

UK
CA

RANGE

	Emergency	Mains	Type*	Dur.	Battery	Part Number
AutoTest	250 lm	150 lm	M/NM	3 h	3.2V 3.0A/h LiFePO ₄	LTS4300LXP3


*M/NM: Maintained/Non Maintained. Same working as Maintained luminaire, with a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.
For version in black colour, add an 'N' at the end of the part number.

SPACING TABLE

LTS4300LXP3 = 250 lm

Mounting Height	0.5 lux				1 lux			
2.0 m	4.26 m	10.27 m	10.36 m	4.27 m	3.66 m	8.89 m	8.95 m	3.65 m
2.5 m	4.88 m	11.83 m	11.92 m	4.88 m	4.00 m	9.83 m	9.87 m	3.97 m
3.0 m	5.28 m	12.87 m	12.96 m	5.26 m	4.26 m	10.63 m	10.63 m	4.22 m
3.5 m	5.61 m	13.81 m	13.86 m	5.58 m	4.44 m	11.28 m	11.26 m	4.40 m
4.0 m	5.88 m	14.63 m	14.65 m	5.84 m	4.56 m	11.82 m	11.78 m	4.52 m
4.5 m	6.10 m	15.36 m	15.35 m	6.05 m	4.63 m	12.26 m	12.20 m	4.58 m

PHOTOMETRIC GUIDE

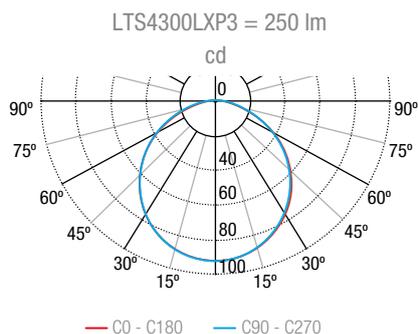

ACCESSORIES




Digital printed legend panel kit for surface ceiling mounted.

- ABT1781
- ABT1781
- ABT1881
- ABT1981



Accessories for recessed mounted into ceiling (white colour) and digital printed legend panel

- ABX1781
- ABX1781
- ABX1881
- ABX1981



AGT000 Protective grille



AET0081 Metallic box for wall recessed mounted



AMT0081 Accessories for ceiling recessed mounted (white colour)



APT316 Multi-direction adhesive pictograph

*For wall recess option it is necessary to order AET0081+AMT00(x)1