



Surface

Real size

WALYA

SPECIFICATION


Wall	Surface	✓
	Recessed	x
Ceiling	Surface	x
	Recessed	x

Cable entry from rear of the luminaire

-  Polycarbonate body
-  Circular Lens + Hall Lens
- IP** IP42
- IK** IK04
- lm** 150 lm
-  Duration: 3 h · Battery: LiFePO₄
-  Charging time: 12 h
-  Supply: 230 V - 50 Hz
- LED** LED temperature: 4000 °K
-  Working temperature: 0 °C to +40 °C
-  AutoTest



DIMENSIONS (mm)

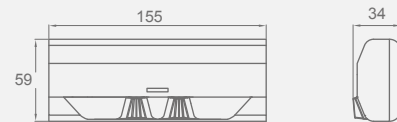

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
DALI: EN 62386

CERTIFICATIONS



RANGE

	Emergency	Mains	Type*	Dur.	Battery	Part Number
AutoTest	150 lm		NM	3 h	3.2V 1.5A/h LiFePO ₄	LYW3150LX3
	150 lm	90 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LYW3150LXP3
DALI	150 lm	90 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LYW3150LAP3

*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.

*M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.

For black version, add "N" at the end of the part number. Luminous flux decreases by 18% in black colour version.

SPACING TABLE

LYW3150LX3 = 150 lm

Mounting Height	0.5 lux				1 lux			
	↔↔↔	↔↔↔	↔↔↔	↔↔↔	↔↔↔	↔↔↔	↔↔↔	↔↔↔
2.0 m	2.22 m	7.96 m	12.27 m	4.57 m	1.80 m	6.39 m	9.07 m	2.88 m
2.5 m	2.42 m	8.63 m	12.80 m	4.24 m	1.86 m	6.86 m	8.96 m	2.52 m
3 m	2.54 m	9.19 m	12.85 m	4.00 m	1.86 m	7.20 m	8.37 m	2.28 m
3.5 m	2.61 m	9.65 m	12.70 m	3.61 m	1.83 m	7.41 m	7.70 m	2.31 m
4 m	2.65 m	10.02 m	12.19 m	3.24 m	1.73 m	7.54 m	6.96 m	2.38 m
4.5 m	2.61 m	10.29 m	11.58 m	3.19 m	1.38 m	7.57 m	6.68 m	2.24 m

PHOTOMETRIC GUIDE

LYW3150LX3 = 150 lm
cd

