



150 lm Emergency



300 lm Emergency

XENA FLAT

SPECIFICATION

Wall	Surface	✓
	Semi recessed	✓
Ceiling	Surface	✓
	Recessed	✓

Polycarbonate body

Diffuser: Transparent Polycarbonate

IP42

IK07

150 lm - 300 lm

Duration: 3 h · Battery: LiFePO₄

Charging time: 12 h

Supply: 230 V - 50 Hz

LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C

Standard

AutoTest



DIMENSIONS (mm)

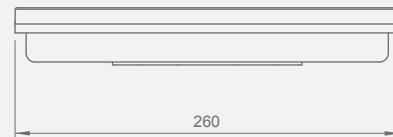

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
DALI: EN 62386

CERTIFICATIONS



LED



RANGE

	Emergency	Mains	Type*	Dur.	Battery	Part Number
AutoTest	150 lm		NM	3 h	3.2V 1.5A/h LiFePO ₄	LXF9150LX3T
	150 lm	90 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LXF9150LXP3T
	300 lm	180 lm	M/NM	3 h	3.2V 3.0A/h LiFePO ₄	LXF9250LXP3T
DALI	150 lm	90 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LXF9150LAP3T

*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.

*M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode funtion.


For version in black colour, add an 'N' at the end of the part number.

SPACING TABLE

LXF9150LX3T = 150 lm

Mounting Height	0.5 lux				1 lux			
	⌘↔⌘	⌘↔⌘	⌘↔⌘	⌘↔⌘	⌘↔⌘	⌘↔⌘	⌘↔⌘	⌘↔⌘
2.0 m	3.79 m	9.26 m	9.42 m	3.87 m	3.07 m	7.65 m	7.83 m	3.15 m
2.5 m	4.14 m	10.23 m	10.43 m	4.24 m	3.28 m	8.33 m	8.56 m	3.37 m
3.0 m	4.41 m	11.03 m	11.29 m	4.51 m	3.41 m	8.86 m	9.09 m	3.50 m
3.5 m	4.61 m	11.71 m	12.01 m	4.72 m	3.46 m	9.26 m	9.50 m	3.56 m
4.0 m	4.77 m	12.27 m	12.58 m	4.87 m	3.46 m	9.55 m	9.80 m	3.56 m
4.5 m	4.86 m	12.74 m	13.05 m	4.97 m	3.38 m	9.73 m	9.99 m	3.48 m

PHOTOMETRIC GUIDE

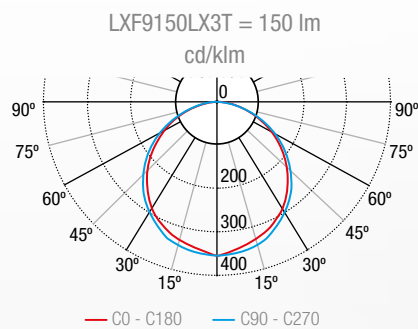

XENA FLAT

ZEMPER

ACCESSORIES



ABX4071

Accessories for ceiling recessed mounted (white colour) + transparent panel X6 (without digital printing)

Set of pictographs (not included)




APV616

APV617

APV618

APV619

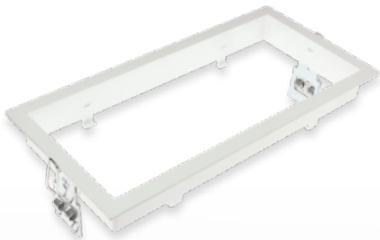


AMD0041

Accessories for ceiling recessed mounted (white colour)




AED0071

Accessories for wall semi-recessed mounted (white colour)

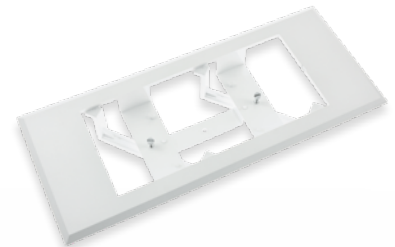

AMU8001

Universal frame for holes with 8W to Diana/Xena

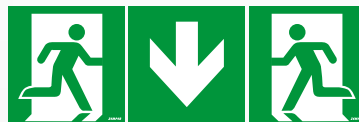

APT316

Modular self-adhesive pictogram set with 4 arrows